

VOR/DME PNT <b>109.6</b> Chan <b>33</b>	APP CRS <b>217°</b>	Rwy Idg <b>5000</b> TDZE <b>666</b> Apt Elev <b>666</b>
---	------------------------	---



# VOR RWY 24

PONTIAC MUNI (PNT)


When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase all MDAs 100 feet; increase S-24 and Circling Cat C visibility ½ SM, and increase JUDUS fix minimums S-24 Cat C visibility ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct PNT VOR/DME and hold.

AWOS-3 <b>119.675</b>	CHICAGO CENTER <b>123.75 259.1</b>	UNICOM <b>123.075 (CTAF) 0</b>
--------------------------	---------------------------------------	-----------------------------------

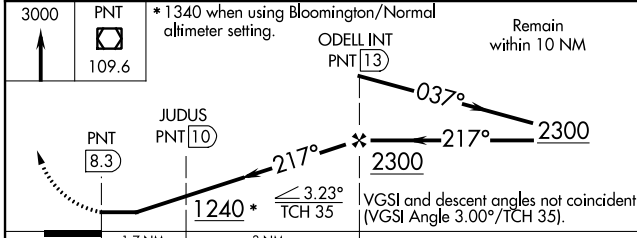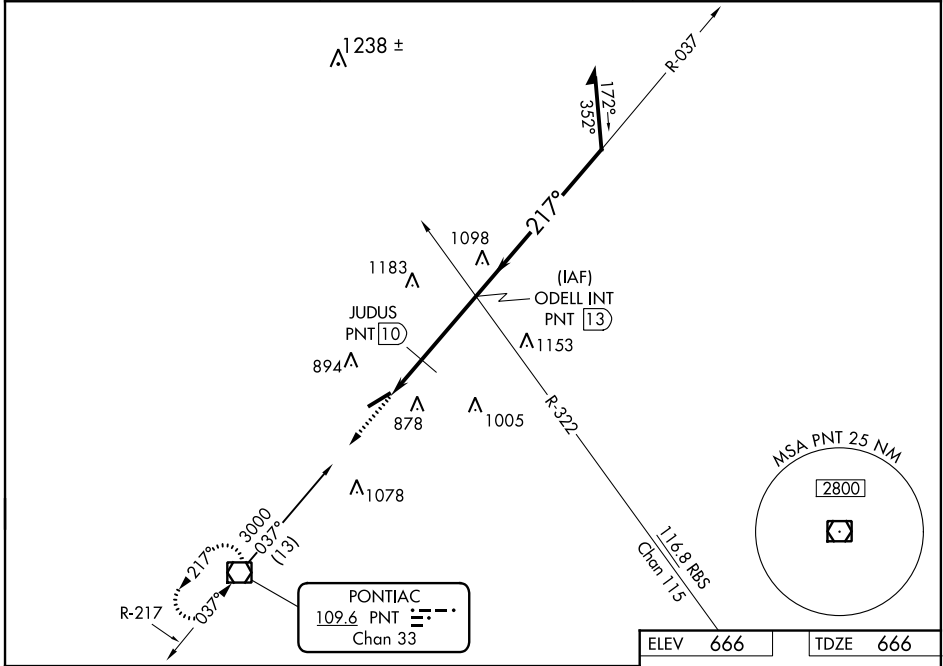

ELEV <b>666</b>	TDZE <b>666</b>
-----------------	-----------------

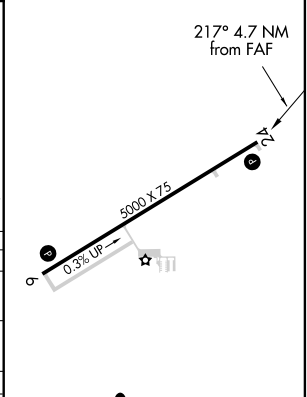

CATEGORY	A	B	C	D
S-24	1240-1	574 (600-1)	1240-1½ 574 (600-1½)	NA
CIRCLING	1240-1	574 (600-1)	1320-1¾ 654 (700-1¾)	NA
JUDUS FIX MINIMUMS				
S-24	1140-1	474 (500-1)	1140-1¼ 474 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)	1200-1 534 (600-1)	1320-1¾ 654 (700-1¾)	NA

MIRL Rwy 6-24 0	FAF to MAP 4.7 NM				
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34