RNAV (GPS) RWY 35
TERRELL MUNI (TRL)

WAAS CH 81999 W35A	APP CRS 356°	Rwy ldg 5006 TDZE 472 Apt Elev 474

Baro-VNAV and VDP NA when using Dallas Love Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dallas Love Fld altimeter setting and increase all DA 73 feet and all MDA 80 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct TUCUN and hold.

ASOS	FORT WORTH CENTER	UNICOM
119.275	132.025 360.75	122.8 (CTAF) L

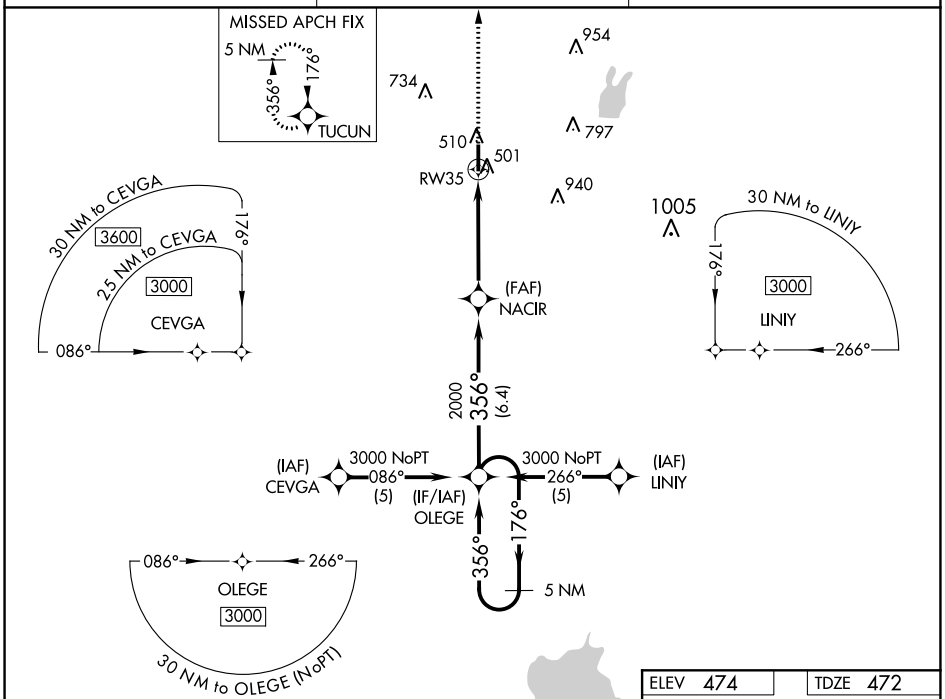

ELEV 474	TDZE 472

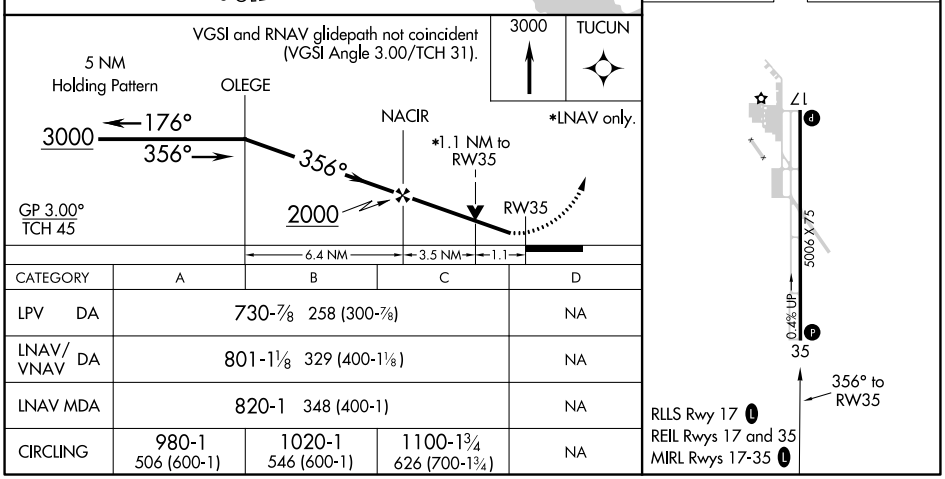

CATEGORY	A	B	C	D
LPV DA	730-⅞ 258 (300-⅞)			NA
LNAV/VNAV DA	801-1⅛ 329 (400-1⅛)			NA
LNAV MDA	820-1 348 (400-1)			NA
CIRCLING	980-1 506 (600-1)	1020-1 546 (600-1)	1100-1¾ 626 (700-1¾)	NA

SC-2, 02 DEC 2021 to 30 DEC 2021
SC-2, 02 DEC 2021 to 30 DEC 2021