


| | | |
|-------------|----------|-------------|
| APP CRS | Rwy Idg | 9003 |
| 280° | TDZE | 413 |
| | Apt Elev | 421 |

RNAV (RNP) Y RWY 28


SYRACUSE HANCOCK INTL (SYR)

| | | |
|---|---------|--|
| RNP AR APCH. | ALSIF-2 | MISSED APPROACH: Climb to 3000 on track 280° to MOYIK and on track 306° to WIFFY and hold. |
| <p>▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to 1%. For inop ALS, increase RNP 0.30 all Cats visibility to 1%.</p> | | |

| | | | | |
|----------------|------------------------|--------------------|--------------------|-----------------------|
| ATIS | SYRACUSE APP CON | SYRACUSE TOWER | GND CON | CLNC DEL |
| 124.225 | 126.125 269.125 | 120.3 239.0 | 121.7 348.6 | 125.05 257.775 |

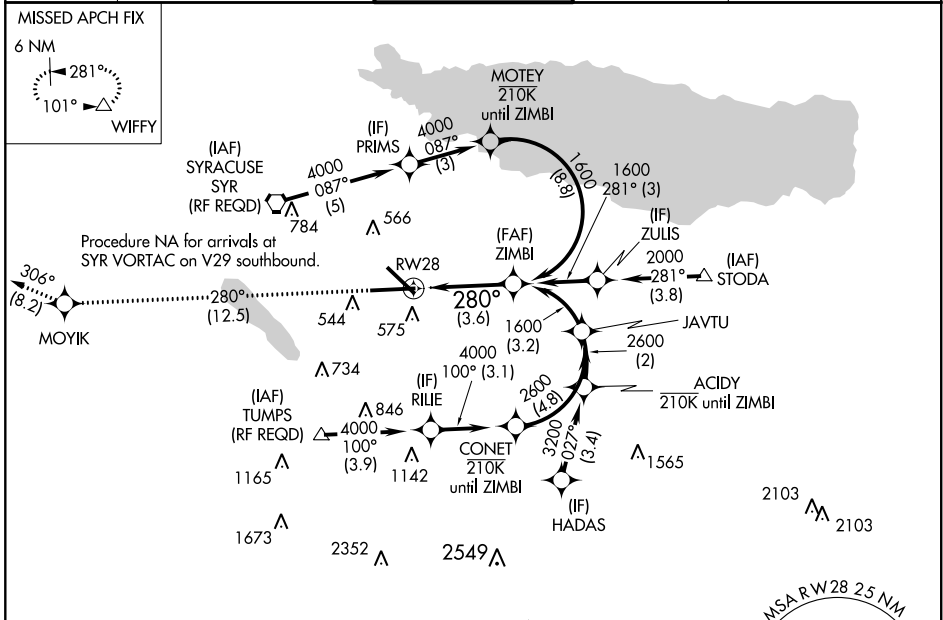

| | | |
|----------|----------|----------|
| ELEV 421 | D | TDZE 413 |
|----------|----------|----------|



| | | | | | | |
|---|-------|---------|-------|---------|-------|-----------------|
| 3000 | MOYIK | tr 280° | WIFFY | tr 306° | ZIMBI | 1600 |
| See planview for multiple IF locations. | | | | | | GP 3.00° TCH 60 |
| RW28 280° 1600 | | | | | | |
| 3.6 NM | | | | | | |

| | | | | |
|-------------|---|-----------|--------------|---|
| CATEGORY | A | B | C | D |
| RNP 0.15 DA | | 862/55 | 449 (500-1) | |
| RNP 0.30 DA | | 957-1 3/4 | 544 (600-1%) | |

AUTHORIZATION REQUIRED

NE-2, 30 DEC 2021 to 27 JAN 2022

NE-2, 30 DEC 2021 to 27 JAN 2022