JOHKR THREE DEPARTURE (RNAV) Departure Routes

(JOHKR3.JOHKR) 19MAY22

LAS VEGAS, NEVADA

HARRY REID INTL (LAS)

RNAV 1 - DME/DME/IRU or GPS.

RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE: FL190

D-ATIS 132.4
CLNC DEL 118.0
CPDLC
GND CON
121.1 270.8 E of 1R/19L
121.9 254.3 W of 1R/19L
LAS VEGAS TOWER
118.75 257.8 (Rwys 1L/19R, 1R/19L)
119.9 257.8 (Rwys 8L/26R, 8R/26L)
LAS VEGAS DEP CON
125.9 307.25

TAKEOFF MINIMUMS

Rwy 1L: Standard with minimum climb of 514′ per NM to 8700.
Rwy 1R: Standard with minimum climb of 525′ per NM to 8700.
Rwy 8L: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 360′ per NM to 10500.
Rwy 8R: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 250′ per NM to 6500.
Rwys 19L/R: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 350′ per NM to 9200.
Rwy 26L: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 360′ per NM to 9300.
Rwy 26R: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 360′ per NM to 9000.

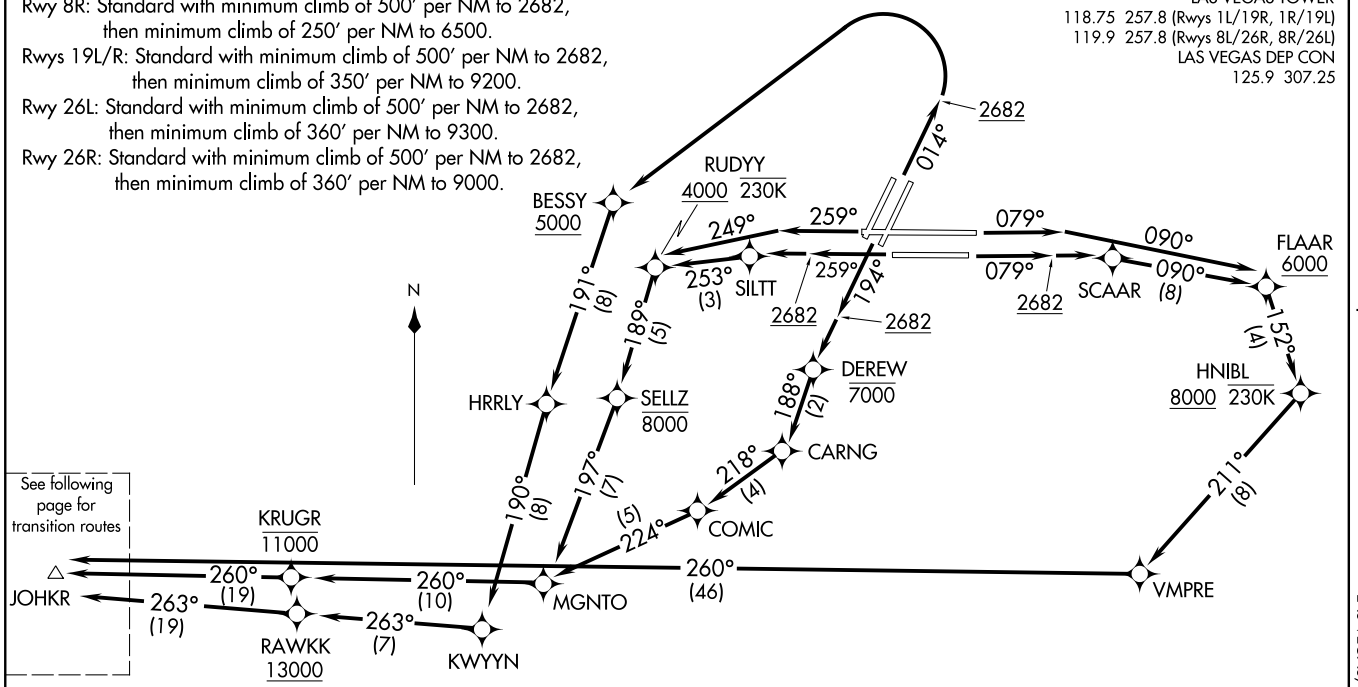

NOTE: Turbojet aircraft only.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

(JOHKR3.JOHKR) 22139

JOHKR THREE DEPARTURE (RNAV) Departure Routes

AL-662 (FAA)

HARRY REID INTL (LAS)

LAS VEGAS, NEVADA