


|  |                        |                             |  |  |
|--|------------------------|-----------------------------|--|--|
| WAAS<br>CH <b>90106</b><br><b>W12A</b> | APP CRS<br><b>126°</b> | Rwy Idg<br>TDZE<br>Apt Elev | 12R<br><b>8587</b><br><b>46</b><br><b>62</b> | 12L<br><b>8831</b><br><b>44</b><br><b>62</b> |
|--|------------------------|-----------------------------|--|--|


# RNAV (GPS) Y RWY 12R

NORMAN Y MINETA SAN JOSE INTL (SJC)

|   |                                       |  |                          |   |       |                         |
|---|---------------------------------------|--|--------------------------|---|-------|-------------------------|
| <p><b>▽</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D visibility to 1½ mile.</p> |                                       |  | <p>MALSR<br/>Rwy 12R</p> | <p>MISSED APPROACH: Climb to 4600 direct HIWAK and on track 124° to GILRO and hold.</p> |       |                         |
| D-ATIS<br><b>126.95</b>   | NORCAL APP CON<br><b>120.1 290.25</b> | SAN JOSE TOWER ★<br><b>124.0</b> (CTAF) <b>257.6</b> | GND CON<br><b>121.7</b>  | CLNC DEL<br><b>118.0</b>  | CPDLC | UNICOM<br><b>122.95</b> |

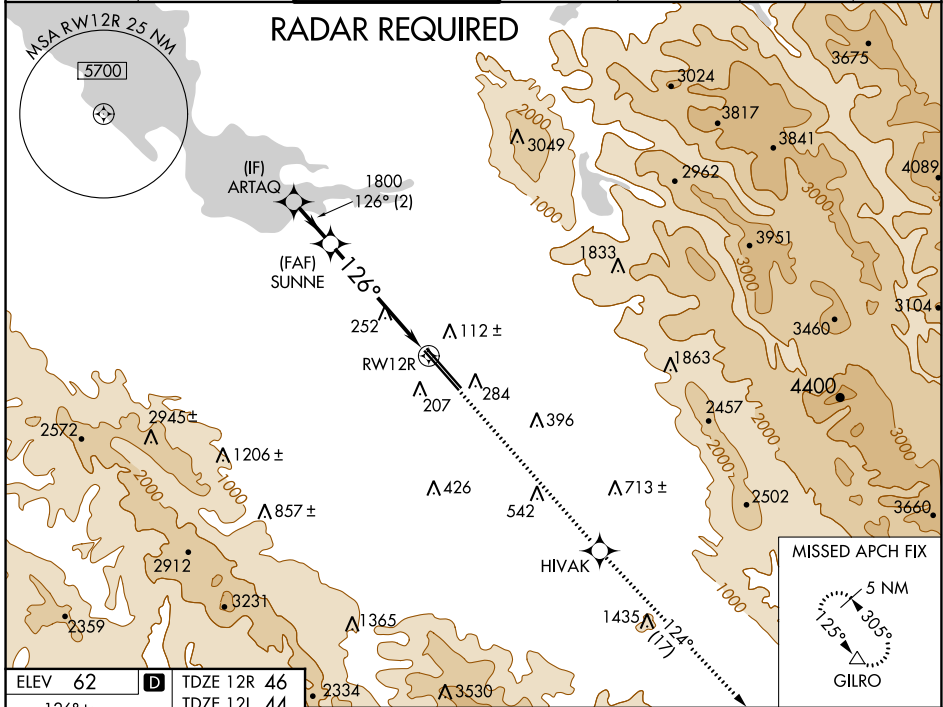

|                |          |  |
|----------------|----------|--|
| ELEV <b>62</b> | <b>D</b> | TDZE 12R <b>46</b><br>TDZE 12L <b>44</b> |
|----------------|----------|--|

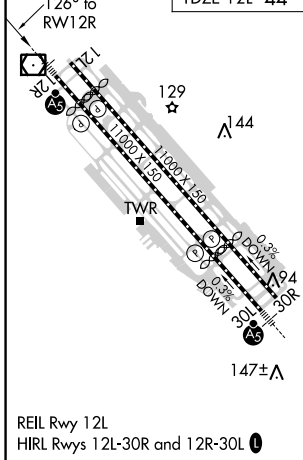

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

|                 |                          |            |                     |         |                   |
|-----------------|--------------------------|------------|---------------------|---------|-------------------|
| ARTAQ           | SUNNE                    | 4600       | HIWAK               | tr 124° | GILRO             |
| 1800            | 1800                     | ↑          | ✦                   | ↖       | △                 |
| GP 3.00° TCH 58 |                          | *LNAV only |                     |         |                   |
| 2 NM            |                          | 4.1 NM     |                     | 1.3 NM  |                   |
| GP 3.00° TCH 58 | *1.3 NM to RWY 12R       |            |                     |         |                   |
| CATEGORY        | A                        | B          | C                   | D       |                   |
| LPV DA          | 246-½                    |            | 200 (200-½)         |         |                   |
| LNAV/VNAV DA    | 371-5/8<br>325 (400-3/8) |            | 371-1 325 (400-1)   |         |                   |
| LNAV MDA        | 520-½ 474 (500-½)        |            | 520-1 474 (500-1)   |         |                   |
| SIDESTEP 12L    | 520-1 476 (500-1)        |            | 520-1½ 476 (500-1½) |         | 520-2 476 (500-2) |

SW-2, 16 JUN 2022 to 14 JUL 2022

SW-2, 16 JUN 2022 to 14 JUL 2022