

LOC/DME I-CER 111.15 Chan 48 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev 9000 90 96
---	------------------------	--

ILS or LOC RWY 35R

ORLANDO INTL (MCO)




From HAHNA: RNAV 1-DME/DME/IRU or GPS required.
Aircraft not DME/DME/IRU or GPS equipped-RADAR required for procedure entry.
DME or RADAR required for LOC only.

Simultaneous approach authorized. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights. For inop ALS, increase S-LOC 35R Cats C/D visibility to RVR 5500. When using alternate missed approach, simultaneous approach NA.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 on ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000.

D-ATIS ARR 121.25 DEP 120.525	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (Rwys 17L-35R, 17R-35L) 124.3 253.5 (Rwys 18L-36R, 18R-36L)	GND CON 126.4 (East) 121.8 (West)	CLNC DEL 134.7 341.7	CPDLC
---	---------------------------------------	--	---	--	-------

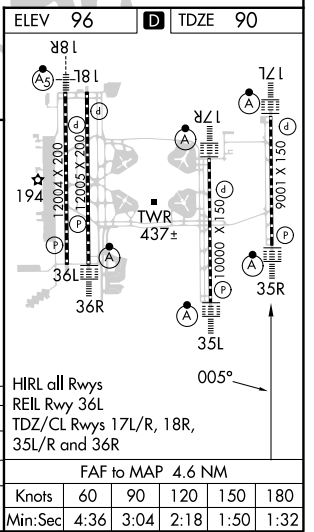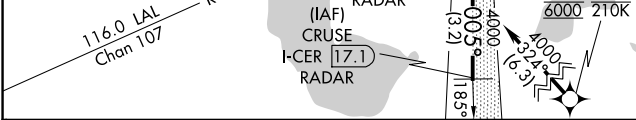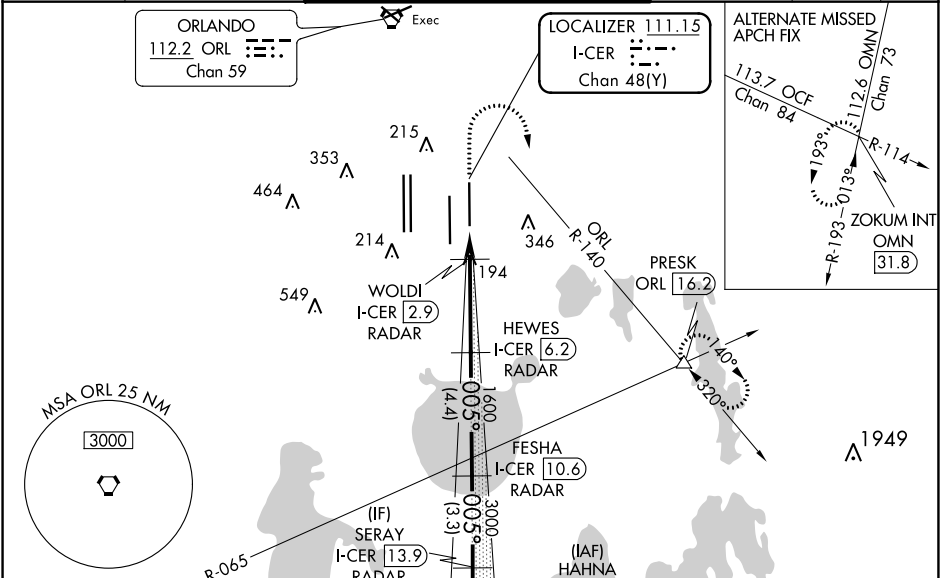

500	3000	PRESK	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).	CRUSE I-CER (17.1) RADAR
↑	↪ ORL R-140	△		SERAY I-CER (13.9) RADAR
				FESHA I-CER (10.6) RADAR
				HEWES I-CER (6.2) RADAR
				WOLDI I-CER (2.9) RADAR
				I-CER (1.7)
				GS 3.00° TCH 55
				1.2 NM 3.3 NM 4.4 NM 3.3 NM 3.2 NM

CATEGORY	A	B	C	D
S-ILS 35R	290/18		200 (200-½)	
S-LOC 35R	460/24	370 (400-½)	460/35	370 (400-¾)
Ⓢ CIRCLING	740-1	644 (700-1)	740-1¾	740-2
			644 (700-1¾)	644 (700-2)

FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

SE-3, 23 MAR 2023 to 20 APR 2023

SE-3, 23 MAR 2023 to 20 APR 2023