RNAV (GPS) Y RWY 14R

EPPLEY AIRFIELD (OMA)

WAAS	APP CRS	Rwy Ldg	9502
CH 56217	142°	TDZE	985
W14A		Apt Elev	985

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F).
For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 3000 direct HETAN and on track 135° to OVR VORTAC and hold.

D-ATIS	OMAHA APP CON	OMAHA TOWER	GND CON	CLNC DEL
120.4	135.875 354.05	132.1 256.9	121.9	119.9

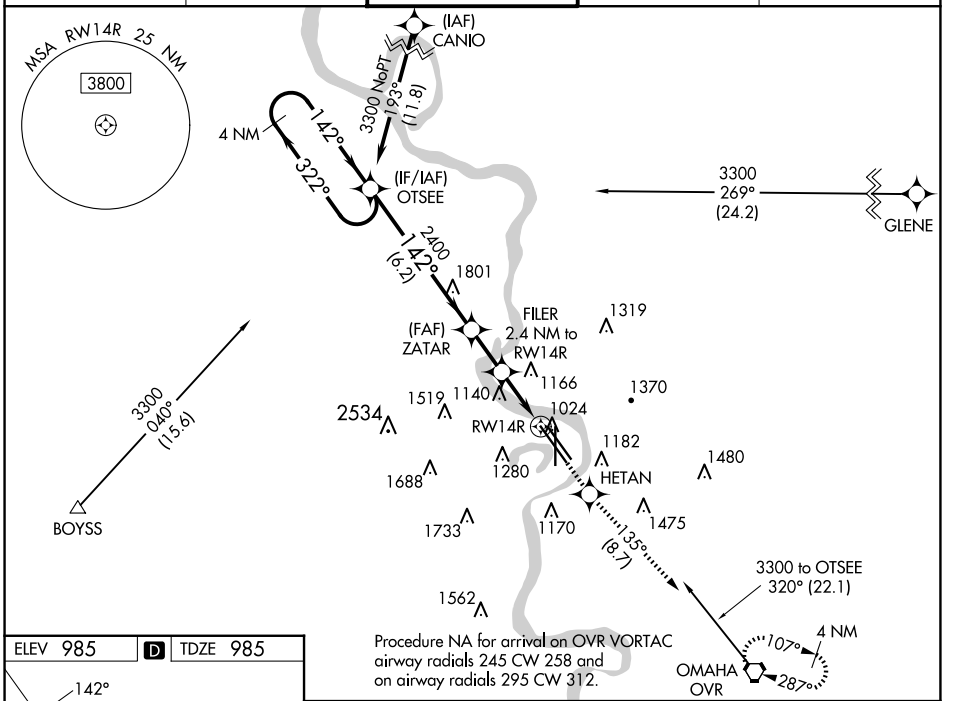

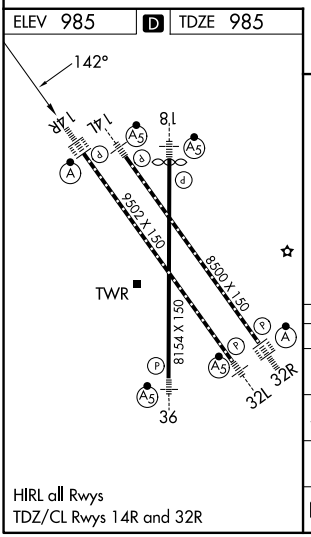

HIRL all Rwys
TDZ/CL Rwys 14R and 32R

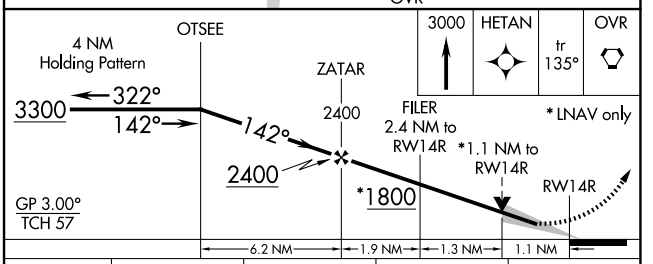

CATEGORY	A	B	C	D
LPV DA	1185/18 200 (200-½)			
LNAV/VNAV DA	1465/50 480 (500-1)			
LNAV MDA	1380/24 395 (400-½)		1380/35 395 (400-⅝)	
C CIRCLING	1660-1 675 (700-1)	1680-1 695 (700-1)	2000-3 1015 (1100-3)	2040-3 1055 (1100-3)

NC-2, 10 JUL 2025 to 07 AUG 2025
NC-2, 10 JUL 2025 to 07 AUG 2025