

APP CRS  
309°

Rwy Idg  
TDZE  
Apt Elev

4499  
1715  
1723

RNAV (GPS) RWY 31

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

RNP APCH-GPS

▼

NA


Rwy 31 Straight-in/Circling and Circling to Rwy 13 NA at night.  
When local altimeter setting not received, use Dunkirk altimeter setting:  
increase all MDAs 200 feet and visibility LNAV Cats C/D ¾ SM, Circling Cat C ½ SM  
and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb  
to 4000 direct CRYST WP  
and hold.

AWOS-3PT  
118.425

BUFFALO APP CON ★  
126.05

UNICOM  
122.975 (CTAF) 0

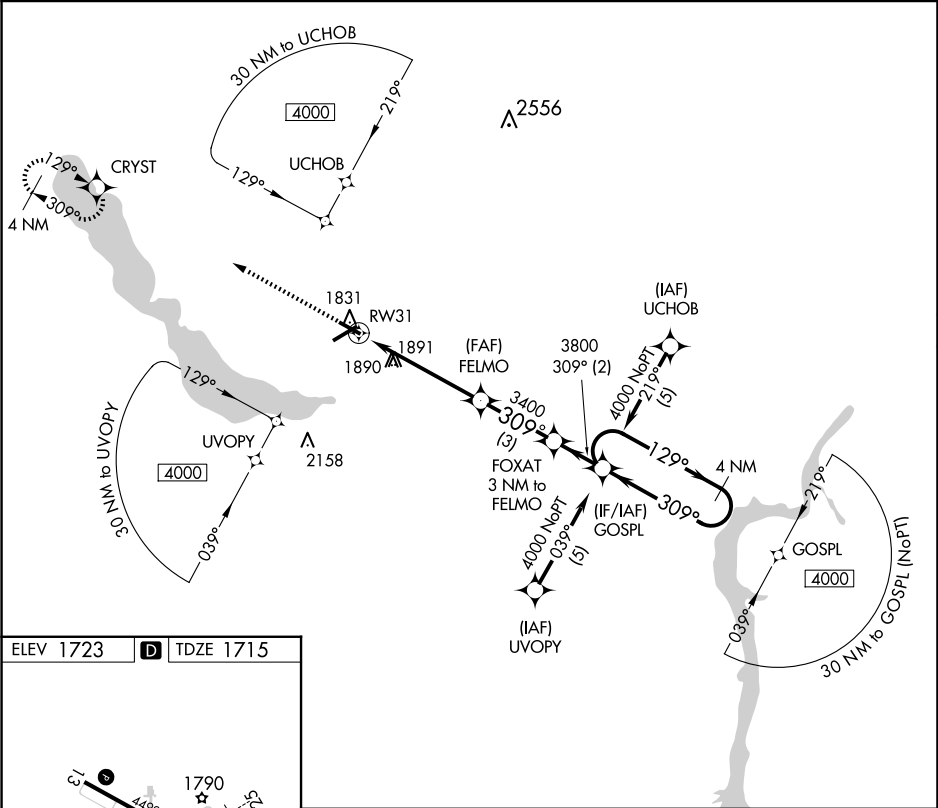

ELEV 1723 D TDZE 1715

4000 CRYST

FOXAT 3 NM to FELMO

GOSPL

4 NM Holding Pattern

129° 4000

309°

3800

3400

3.10° TCH 50

5 NM 3 NM 2 NM

CATEGORY	A	B	C	D
LNAV MDA	2200-1	485 (500-1)	2200-1¼ 485 (500-1¼)	2200-1½ 485 (500-1½)
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)