

WAAS CH 77523 W17A	APP CRS 166°	Rwy Idg TDZE 2830 Apt Elev 2885
--	------------------------	---

RNAV (GPS) RWY 17

SOUTHERN CALIFORNIA LOGISTICS (V/CV)

RNP APCH - GPS.


▼

⚠

Circling NA for Cats C and D southeast of Rwy 35-21. Baro-VNAV and VDP NA when using Edwards AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Edwards AFB altimeter setting: increase LPV DA to 3183 feet and all visibilities to RVR 5500; increase LNAV/VNAV DA to 3233 feet and all visibilities to RVR 6000. Increase all MDAs 160 feet and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3500 then climbing right turn to 6000 direct RLONG and on track 294° to ETHER and hold.

ATIS 135.475	JOSHUA APP CON 124.55 363.0	VICTORVILLE TOWER★ 118.35 (CTAF) 282.225	GND CON 124.45
------------------------	---------------------------------------	--	--------------------------

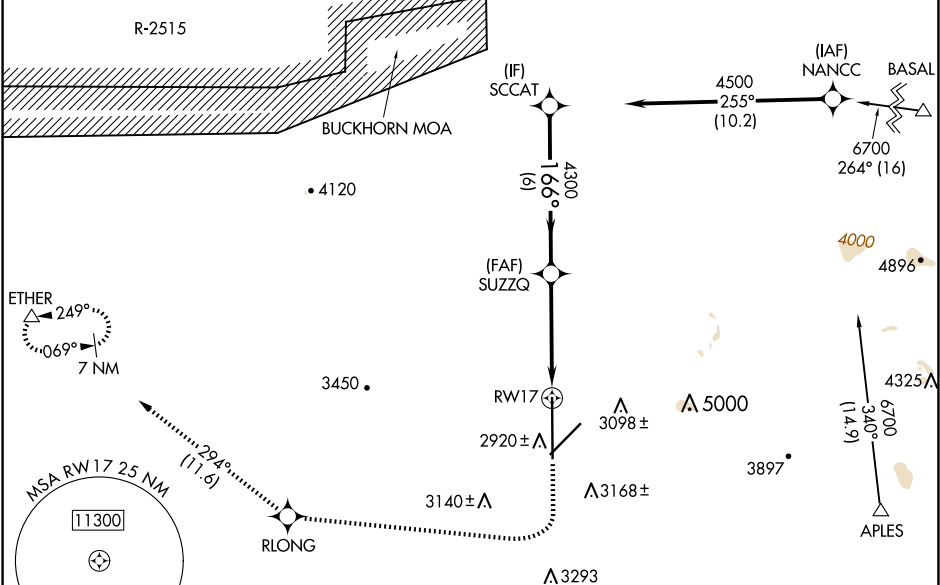

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 81).

	SCCAT	4500	166°	SUZQZ	4300	0.9 NM to RW17	ETHER
GP 3.00°							
TCH 60							
	6 NM	3.6 NM	0.9				

CATEGORY	A	B	C	D
LPV DA		3030/40	200 (200-¾)	
LNAV/VNAV DA		3080/40	250 (200-¾)	
LNAV MDA		3180/55	350 (300-1)	
CIRCLING	3380-1 495 (500-1)	3420-1 535 (600-1)	3460-1½ 575 (600-1½)	3780-3 895 (900-3)

