


| | | | |
|---------------|---------|--------------|----------|
| LOC/DME I-FNO | APP CRS | Rwy Ldg TDZE | 5204 700 |
| 109.7 | 030° | Apt Elev | 708 |
| Chan 34 | | | |

ILS or LOC RWY 3

CLINTON MUNI (CWI)

| | | | |
|-------------------------------------|---------------------|-----------------------------------|--|
| DME or RADAR required for LOC only. | | MALSR | MISSED APPROACH: Climb to 1200 then climbing left turn to 3100 on CVA VORTAC R-022 to CVA VORTAC and hold, continue climb-in-hold to 3100. |
| <div><div></div><div></div></div> | | <div><div></div><div></div></div> | |
| AWOS-3PT | QUAD CITY APP CON * | CLNC DEL | CTAF |
| 125.525 | 125.95 257.8 | 118.5 0 | 122.8 |

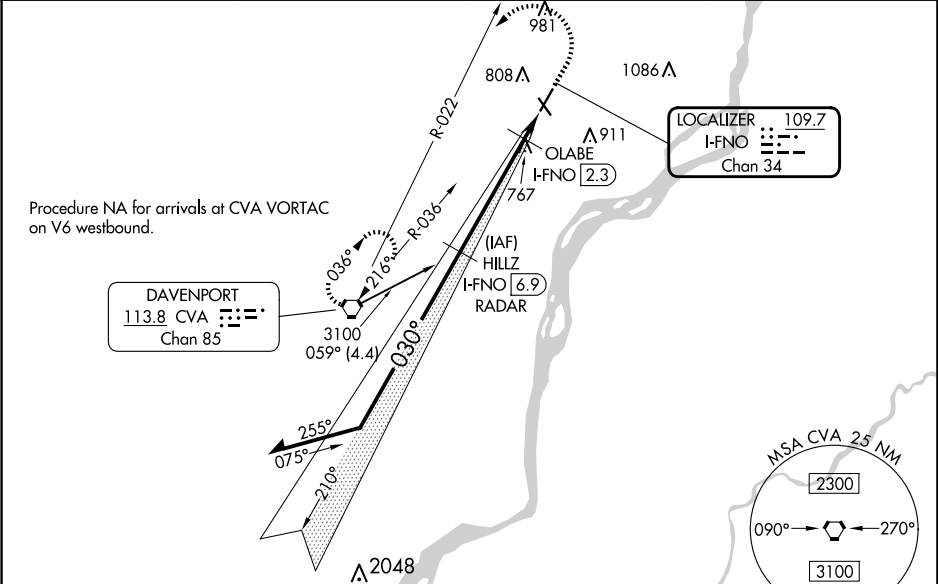

| | | | | |
|-----------------------|--------------------|--------------------|----------------------|--------|
| HILLZ I-FNO 6.9 RADAR | | 1200 | 3100 | CVA |
| Remain within 10 NM | | ↑ | ↙ | ⬡ |
| 3100 | | 2600 | 1120 | 708 |
| 210° | | 030° | 030° | 030° |
| GS 3.00° | | 4.6 NM | 1.2 NM | 5.8 NM |
| TCH 56 | | | | |
| CATEGORY | A | B | C | D |
| S-ILS 3 | 900-½ 200 (200-½) | | | NA |
| S-LOC 3 | 1120-½ | 420 (500-½) | 1120-¾ 420 (500-¾) | NA |
| CIRCLING | 1140-1 432 (500-1) | 1240-1 532 (600-1) | 1240-1½ 532 (600-1½) | NA |
| OLABE FIX MINIMUMS | | | | |
| S-LOC 3 | 1020-½ 320 (400-½) | | | NA |
| CIRCLING | 1140-1 432 (500-1) | 1240-1 532 (600-1) | 1240-1½ 532 (600-1½) | NA |

