WAAS	APP CRS		
CH **40339**	**350°**	Rwy Idg	**10001**
W35A		TDZE	**5885**
		Apt Elev	**5885**

RNAV (GPS) RWY 35R

CENTENNIAL (APA)

RNP APCH.

Circling Rwy 35L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: (Do not exceed 240K until BPUTN) Climb to 8200 then climbing left turn to 9600 direct BPUTN and hold.

ATIS	DENVER APP CON	CENTENNIAL TOWER	GND CON	CLNC DEL
120.3	**132.75 269.3**	**118.9**	**121.8**	**128.6**

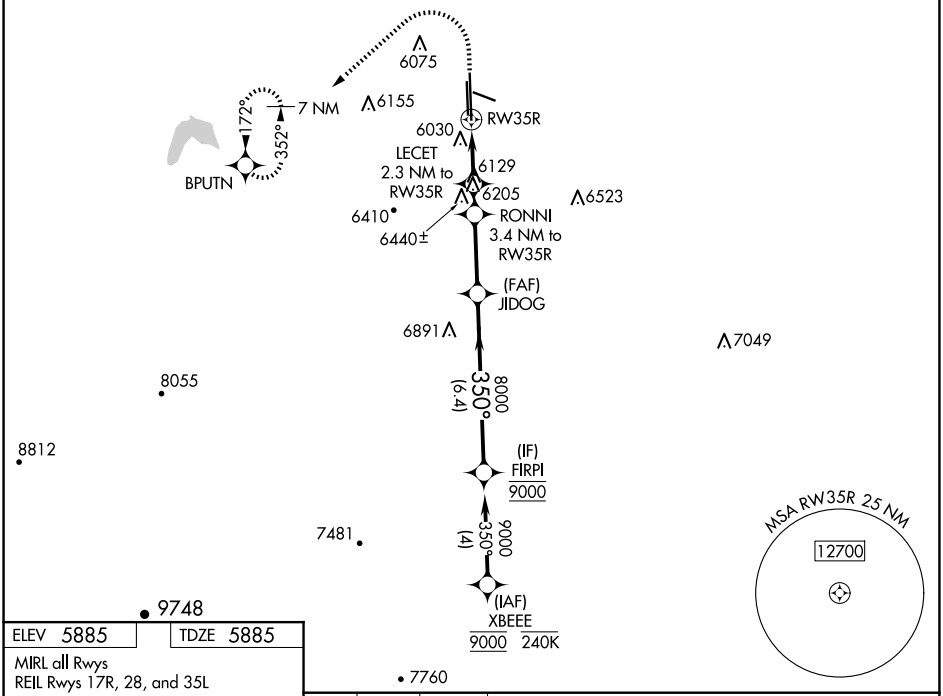

ELEV 5885 | TDZ 5885

MIRL all Rwys

REIL Rwys 17R, 28, and 35L

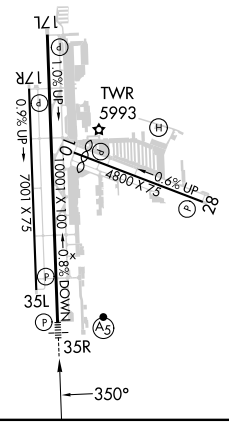

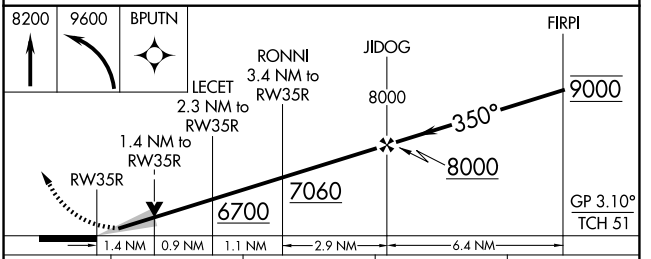

CATEGORY	A	B	C	D
LPV DA	6085-½ 200 (200-½)			
LNAV/VNAV DA	6324-¾ 439 (500-¾)			
LNAV MDA	6380-½ 495 (500-½)		6380-1 495 (500-1)	
C CIRCLING	6400-1 515 (600-1)	6540-1 655 (700-1)	6740-2½ 855 (900-2½)	6760-2¾ 875 (900-2¾)

SW-1, 10 JUL 2025 to 07 AUG 2025
SW-1, 10 JUL 2025 to 07 AUG 2025