RNAV (GPS) RWY 34

AITKIN MUNI/STEVE KURTZ FLD (AIT)

WAAS	APP CRS		
CH **82431**	**344°**	Rwy Idg	**4000**
W34A		TDZE	**1206**
		Apt Elev	**1206**

RNP APCH - GPS.

T A Circling NA to Rwys 8 and 26. Rwy 34 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using HZX altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use HZX altimeter setting: increase LPV DA to 1588 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1660 feet and all visibilities ¼ SM; increase all MDAs 40 feet and LNAV visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3400 direct ZAPUB and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.675	**118.05 239.0**	**123.05** (CTAF) L

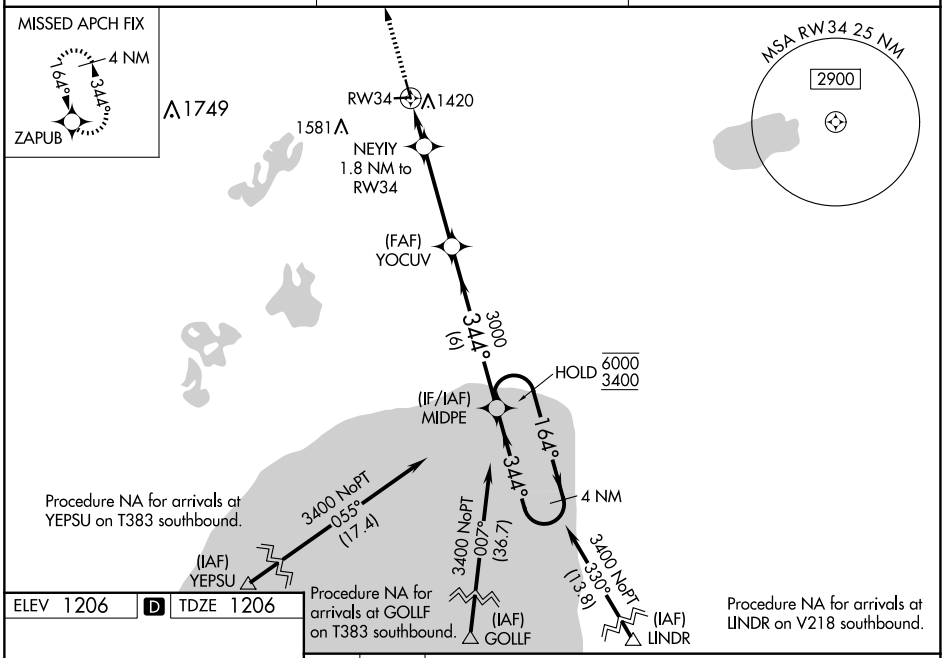

ELEV 1206 D TDZE 1206

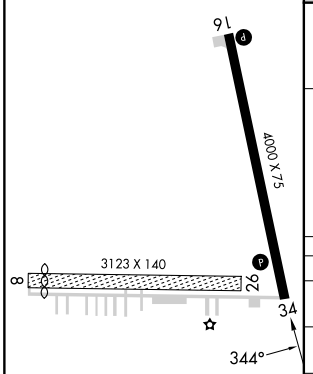

REIL Rwys 16 and 34 L
MIRL Rwy 16-34 L

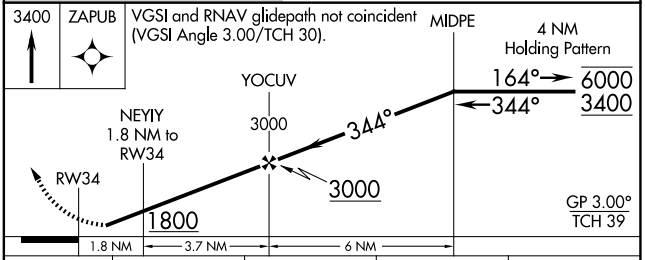

CATEGORY		A	B	C	D
LPV	DA	1548-1⅛ 342 (400-1⅛)			NA
LNAV/VNAV	DA	1620-1⅜ 414 (500-1⅜)			NA
LNAV	MDA	1720-1 514 (600-1)		1720-1⅜ 514 (600-1⅜)	NA
C CIRCLING		1780-1 574 (600-1)		1900-2 694 (700-2)	NA

NC-1, 10 JUL 2025 to 07 AUG 2025
NC-1, 10 JUL 2025 to 07 AUG 2025