

LOC/DME I-JVH	APP CRS	Rwy Ldg	11440
109.5	150°	TDZE	192
Chan 32		Apt Elev	192

ILS Y or LOC Y RWY 15
BANGOR INTL (BGR)


ASR



Circle NA NE of Rwy 15-33. DME or RADAR required.
For inoperative ALS, increase S-ILS 15 Cat E visibility to RVR 4000, and S-LOC 15 Cat C/D/E visibility to 1 3/8 SM.

ALSF-2



MISSED APPROACH: Climb to 3000 on heading 150° and BGR VORTAC R-154 to ELSUH/BGR 18.3 DME/RADAR and hold.

ATIS	BANGOR APP CON	BANGOR TOWER	GND CON	CLNC DEL
127.75	118.925 239.3	120.7 233.7	121.9 348.6	135.9 348.6

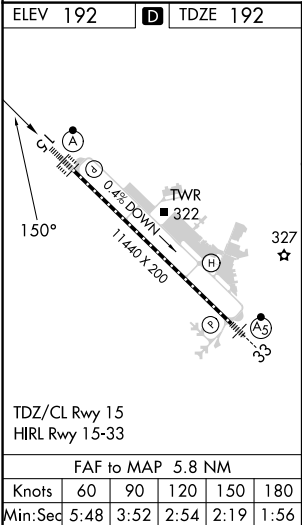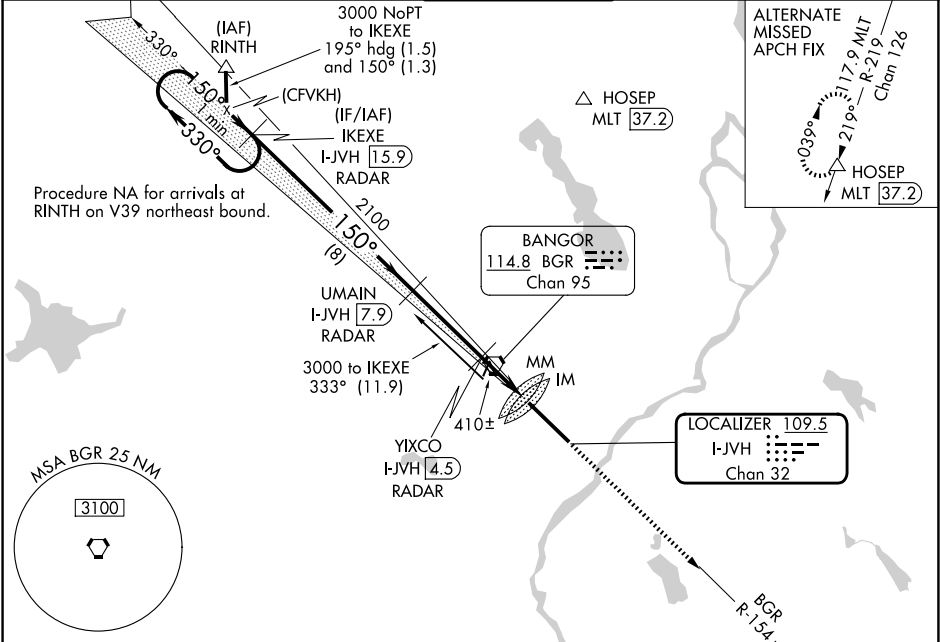

DME or RADAR REQUIRED					
One Minute Holding Pattern					
IKEXE I-JVH 15.9 RADAR					
UMAIN I-JVH 7.9 RADAR					
YIXCO I-JVH 4.5 RADAR					
MM I-JVH 3.3					
IM I-JVH 2.1					
*LOC only.					
3000 150° 2100 150° 2100 150° 2100 150° 2100 150°					
8 NM 3.4 NM 1.1 0.9 0.3 0.1					
CATEGORY	A	B	C	D	E
S-ILS 15	392/18 200 (200-1/2)				
S-LOC 15	660/24	468 (500-1/2)	660/50	468 (500-1)	
CIRCLING	660-1	720-1	740-1 1/2	820-2	880-2 1/2
	468 (500-1)	528 (600-1)	548 (600-1 1/2)	628 (700-2)	688 (700-2 1/2)