

WAAS CH 97432 W36A	APP CRS 356°	Rwy Idg TDZE 1954 Apt Elev 1954	5949
--	------------------------	---	-------------


RNAV (GPS) RWY 36

CHILDRESS MUNI (CDS)

⚠ Circling to Rwy 4, 18, 22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all DA 188 feet, all MDA 200 feet and increase LPV all Cnts visibility $\frac{3}{8}$ mile, LNAV/VNAV all Cnts visibility $\frac{3}{4}$ mile, LNAV Cnts C and D visibility $\frac{3}{8}$ mile, Circling Cat C visibility $\frac{3}{4}$ mile, and Circling Cat D visibility $\frac{1}{2}$ mile. Baro-VNAV and VDP NA with Altus/Quartz Mountain Rgnl altimeter setting.

MISSED APPROACH:
Climb to 2400 then climbing right turn to 4000 direct JAPUX and hold.

ASOS 135.125	FORT WORTH CENTER 133.5 350.35	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

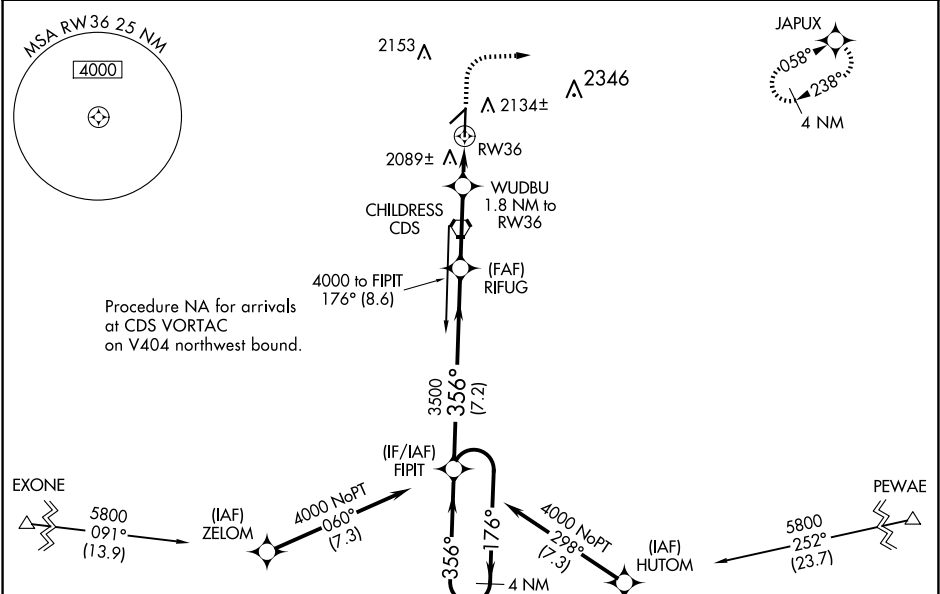

ELEV 1954		TDZE 1954		
<div><div>4 NM Holding Pattern</div><div><div>4000</div><div>GP 3.00° TCH 40</div><div>←176° 356°→</div><div>3500</div><div>7.2 NM</div><div>2.9 NM</div><div>0.7</div><div>1.1</div><div>2400</div><div>4000</div><div>JAPUX</div><div>WUDBU 1.8 NM to RW36</div><div>*1.1 NM to RW36</div><div>RW36</div><div>*2560</div><div>*LNAV only.</div><div>GP 3.00° TCH 40</div><div>356° to RW36</div></div></div>				
CATEGORY	A	B	C	D
LPV DA	2154- ³ / ₄		200 (200- ³ / ₄)	
LNAV/ VNAV DA	2376-1 ¹ / ₂		422 (500-1 ¹ / ₂)	
LNAV MDA	2340-1	386 (400-1)	2340-1 ¹ / ₈	386 (400-1 ¹ / ₈)
CIRCLING	2500-1	546 (600-1)	2600-1 ³ / ₄ 646 (700-1 ³ / ₄)	2700-2 ¹ / ₂ 746 (800-2 ¹ / ₂)

442 X 60

5949 X 75

81

36

☆

356° to RW36

MIRL Rwy 18-36