

WAAS CH 45500 W07A	APP CRS 070°	Rwy Idg 9810 TDZE 30 Apt Elev 34
--	------------------------	---

RNAV (GPS) RWY 7L

DAYTONA BEACH INTL (DAB)




Inoperative table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. For inoperative MALSR, increase LNAV/VNAV visibility all Cats to 1¼ and increase LNAV Cats A/B visibility to RVR 5000 and Cats C/D visibility to RVR 6000.





MISSED APPROACH:
Climb to 1 600 direct
GILNE and hold.

ATIS 132.875	DAYTONA APP CON 125.8 269.075	DAYTONA TOWER 120.7 257.8	GND CON 121.9 348.6	CLNC DEL 119.3
-----------------	----------------------------------	------------------------------	------------------------	-------------------

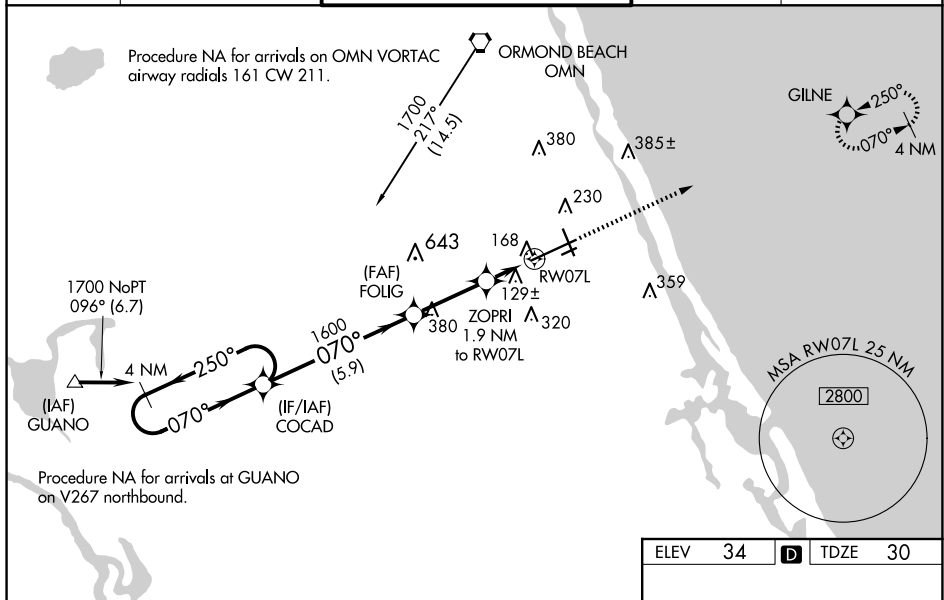

ELEV	34	D	TDZE	30
------	----	----------	------	----

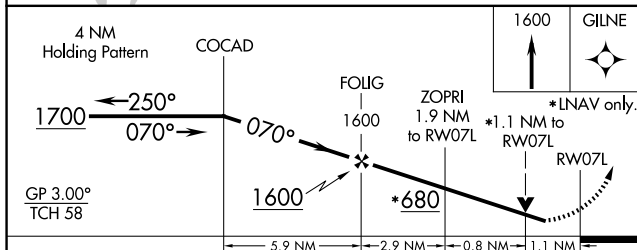

CATEGORY		A	B	C	D
LPV	DA	230/40 200 (200-¾)			
LNAV/ VNAV	DA	429/45 399 (400-¾)			
LNAV	MDA	420/40 390 (400-¾)			
 CIRCLING		540-1 506 (600-1)	680-1¾ 646 (700-1¾)	700-2 666 (700-2)	

