
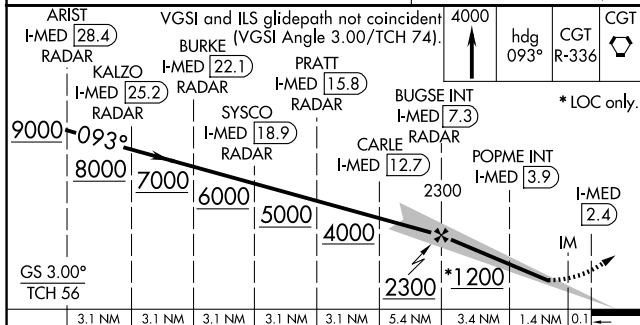


ILS or LOC RWY 10L
CHICAGO O'HARE INTL (ORD)

ALSF-2

MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 132.7 348.0	GND CON (TWR CENTER) 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
----------------------------	-------------------------------------	-----------------------------	---	-------------------------------	-------------------	-------

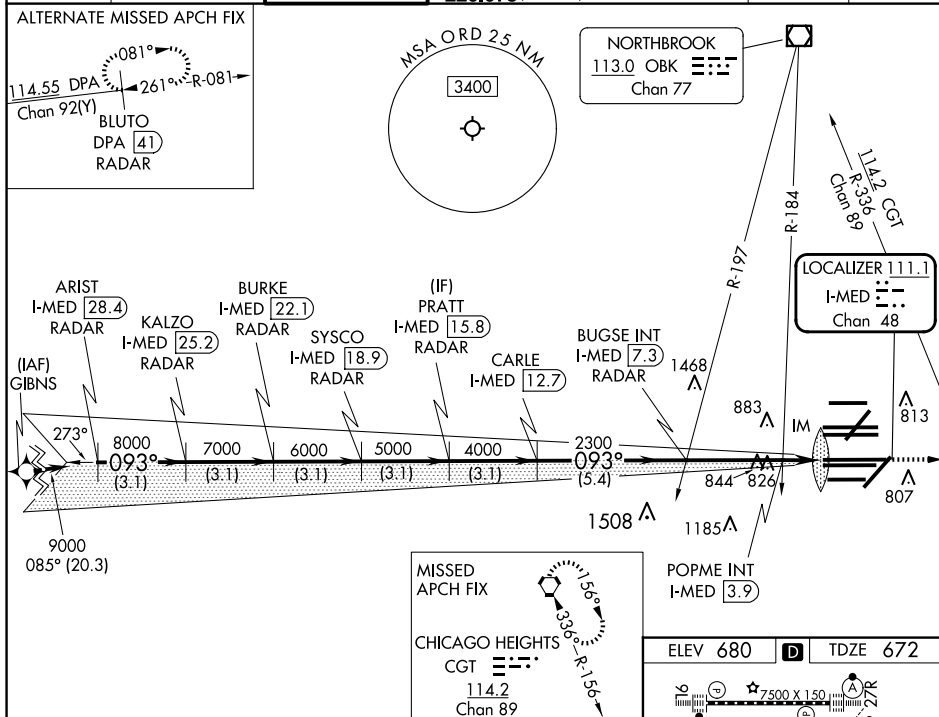

CATEGORY	A	B	C	D
S-ILS 10L	872/18		200 (200-½)	
S-LOC 10L	1200/24	528 (600-½)	1200/55	528 (600-1)
POPME FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 10L	1080/24	408 (400-½)	1080/40	408 (400-¾)

ELEV 680 D TDZE 672

7500 X 150 27R

TWR

7000 X 50 27R

11245 X 200 27C

11260 X 150 27C

13000 X 150 27C

10800 X 200 28C

7500 X 150 28C

100 28C

093°

HIRL all Rwy's
TDZ/CL all Rwy's except 4L

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38