NORCAL DEP CON
135.1 307.2
D-ATIS 133.775
CLNC DEL 121.1
CPDLC
GND CON
121.9 (Rwys 10L/R, 28L/28R, 15/33)
121.75 (Rwy 12/30)
OAKLAND TOWER
118.3 291.65 (Rwys 10L/R, 28L/28R, 15/33)
127.2 256.9 (Rwy 12/30)

TOP ALTITUDE: 10000

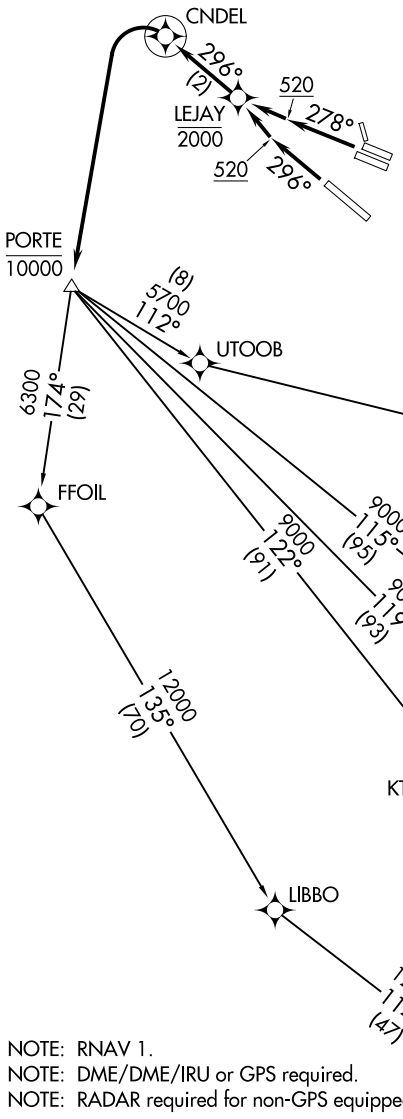

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L, 28R: Climb on heading 278° to 520, then direct to cross LEJAY at or below 2000, then on track 296° to CNDEL, then left turn direct to cross PORTE at or below 10000. Thence. . .

TAKEOFF RUNWAY 30: Climb on heading 296° to 520, then direct to cross LEJAY at or below 2000, then on track 296° to CNDEL, then left turn direct to cross PORTE at or below 10000. Thence. . .

. . . . on (transition). Maintain 10000, expect filed altitude 10 minutes after departure.

KAYEX TRANSITION (CNDEL5.KAYEX)
KTINA TRANSITION (CNDEL5.KTINA)
NTELL TRANSITION (CNDEL5.NTELL)
SUSEY TRANSITION (CNDEL5.SUSEY)
YYUNG TRANSITION (CNDEL5.YYUNG)

TAKEOFF MINIMUMS
Rwys 10L/R, 12, 15, 33: NA - ATC.
Rwys 28L/R, 30: Standard with minimum climb of 500' per NM to 520.

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required for non-GPS equipped aircraft.

NOTE: Chart not to scale.

SW-2, 07 AUG 2025 to 04 SEP 2025
SW-2, 07 AUG 2025 to 04 SEP 2025