

LOC/DME I-SPA

109.1

Chan **28**

APP CRS

047°

Rwy Idg

5852

TDZE

802

Apt Elev

802

SPARTANBURG DOWNTOWN MEML/SIMPSON FLD (SPA)

ILS or LOC RWY 5

DME required.

V

A


For inop ALS, increase S-LOC 5 Cats C/D visibility to 1 SM.

MALSR

A5

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct SPA VORTAC and hold, continue climb-in-hold to 3000.

AWOS-3 133.925	GREER APP CON ★ 119.4 350.2	CINC DEL 120.55	UNICOM 123.0 (CTAF) 0
--------------------------	---------------------------------------	---------------------------	--

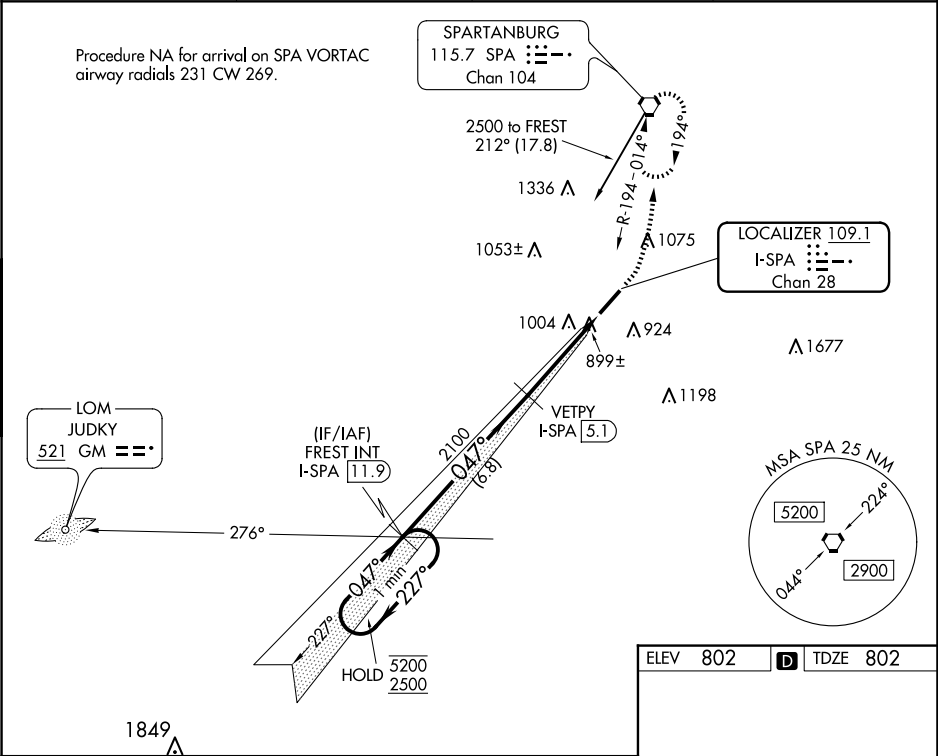

One Minute Holding Pattern

FREST INT I-SPA **11.9**

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).

1300

3000

SPA

5200 \leftarrow 227°

2500 \rightarrow 047°

GS 3.00° TCH 50

2100

2100

*LOC only.

*I-SPA **2.1**

I-SPA **1.1**

6.8 NM

2.9 NM

1 NM

CATEGORY	A	B	C	D
S-ILS 5	1002- ³ / ₄	200 (200- ³ / ₄)		
S-LOC 5	1160- ³ / ₄	358 (400- ³ / ₄)		
CIRCLING	1320-1	518 (600-1)	1380-1 ¹ / ₂ 578 (600-1 ¹ / ₂)	1420-2 618 (700-2)

HIRL Rwy 5-23 **0**

REIL Rwy 23 **0**

862

3852 x 100

047°