RNAV (GPS) RWY 35

GARDEN CITY RGNL (GCK)

WAAS	APP CRS	Rwy Idg	7299
CH 63103	355°	TDZE	2885
W35A		Apt Elev	2891

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV Cats C/D visibility to ¾ SM, and LNAV Cats C/D visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 4700 direct WEMDI and hold.

ASOS	KANSAS CITY CENTER	GARDEN CITY TOWER★	GND CON	UNICOM
121.325	125.2 285.425	118.15 (CTAF) L 254.4	119.0 254.4	122.95

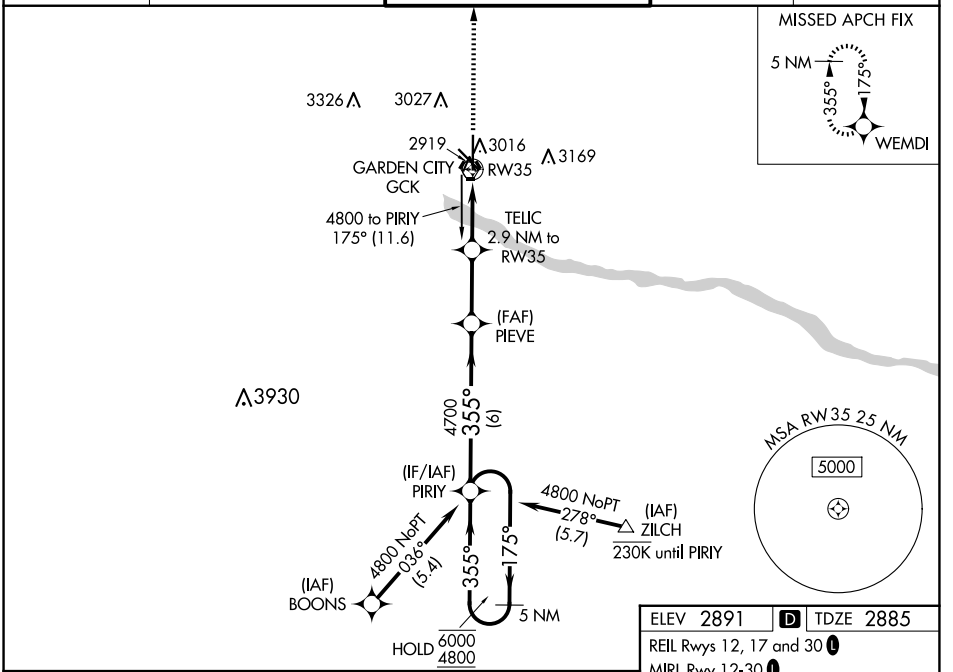

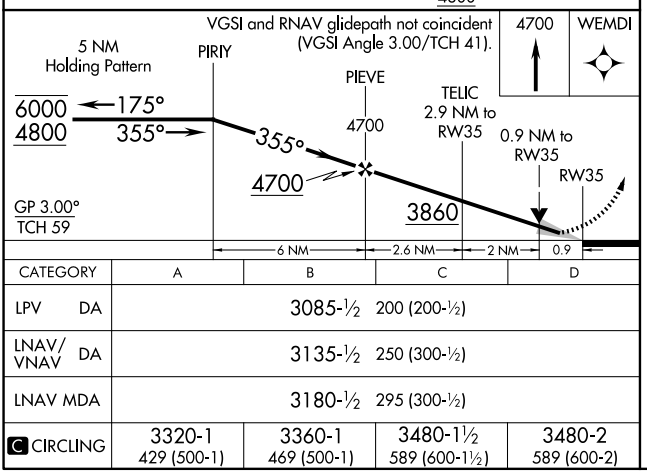

CATEGORY	A	B	C	D
LPV DA	3085-½	200 (200-½)		
LNAV/VNAV DA	3135-½	250 (300-½)		
LNAV MDA	3180-½	295 (300-½)		
C CIRCLING	3320-1 429 (500-1)	3360-1 469 (500-1)	3480-1½ 589 (600-1½)	3480-2 589 (600-2)

ELEV 2891 D TDZE 2885

REIL Rwys 12, 17 and 30 L

MIRL Rwy 12-30 L

HIRL Rwy 17-35 L

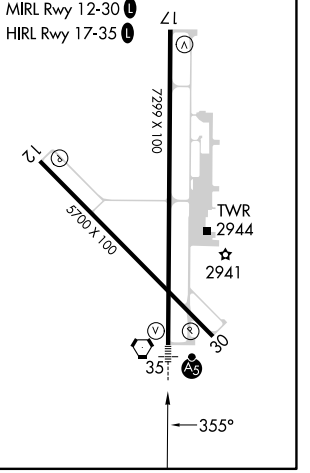

NC-2, 07 AUG 2025 to 04 SEP 2025
NC-2, 07 AUG 2025 to 04 SEP 2025