REPUBLIC ONE DEPARTURE

TOP ALTITUDE: 3000

ATIS 126.65
CLNC DEL
128.25
GND CON
121.6 269.6
REPUBLIC TOWER ★
118.8 (CTAF) 279.65
NEW YORK DEP CON
125.7 353.75

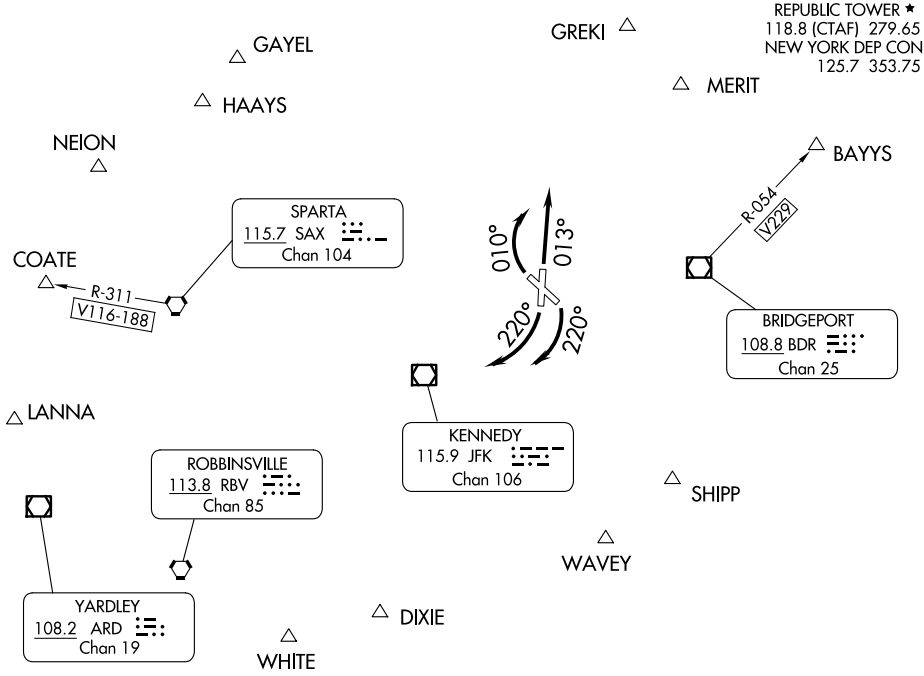

NOTE: RADAR required.

TAKEOFF MINIMUMS:
Rwy 14, 19: Standard.
Rwy 1: 300-1¼ or standard with minimum climb of 240' per NM to 300, or alternatively, with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later then 1900' prior to DER.
Rwy 32: Standard with minimum climb of 240' per NM to 800.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 1: Climb heading 013°, thence....
TAKEOFF RUNWAYS 14, 19: Climbing right turn to heading 220°, thence....
TAKEOFF RUNWAY 32: Climbing right turn to heading 010°, thence....

....RADAR vectors to assigned route or depicted fix. Maintain 3000. Expect clearance to filed altitude/flight level 10 minutes after departure.

BAYYS DEPARTURES: RADAR vectors will be provided to BDR VOR/DME R-054 to BAYYS.
COATE DEPARTURES: RADAR vectors will be provided to SAX VORTAC R-311, to COATE.

NE-2, 07 AUG 2025 to 04 SEP 2025
NE-2, 07 AUG 2025 to 04 SEP 2025