

WAAS
CH **86419**
W14A

APP CRS
139°

Rwy Idg
TDZE **755**
Apt Elev **755**

RNAV (GPS) RWY 14L

UNIVERSITY OF ILLINOIS/WILLARD (CMI)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet and all MDA 60 feet, increase LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Baro-VNAV and ASR VDP NA when using Rantoul altimeter setting.

MISSED APPROACH: Climb to 2600 direct ODEBE and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	CLNC DEL 128.75	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

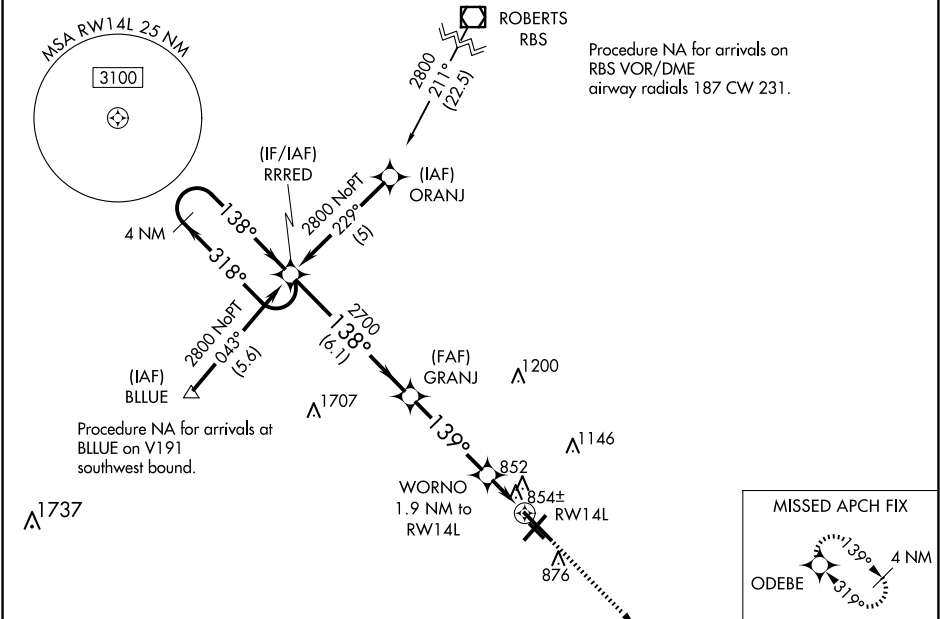

4 NM Holding Pattern					RRRED	GRANJ	2600	ODEBE
2800 ← 318°		138° →		138°	2700	WORNO 1.9 NM to RW14L	*1146	
GP 3.00° TCH 48		2700		139°	*1380	*1 NM to RW14L	RW14L	
6.1 NM		4 NM		0.9	1 NM			
CATEGORY	A	B	C	D				
LPV DA	955-¾		200 (200-¾)					
LNAV/VNAV DA	1170-1½		415 (500-1½)					
LNAV MDA	1120-1		365 (400-1)	1120-1¼				
				365 (400-1¼)				
CIRCLING	1240-1	485 (500-1)	1500-2¼	1500-2½				
			745 (800-2¼)	745 (800-2½)				

HIRL Rwy 14L-32R 1

MIRL Rwy 4-22 1

MIRL Rwy 14R-32L