

LOC I-AWO <u>111.5</u>	APP CRS 342°	Rwy Idg 5332 TDZE 135 Apt Elev 142
----------------------------------	------------------------	---

LOC RWY 34
ARLINGTON MUNI (A WO)




<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">V</div> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">A</div> <div>NA</div> </div>	<p>ADF required. When local altimeter setting not received, use Whidbey Island NAS (Ault Field) altimeter setting: increase all MDA 80 feet and visibility S-34 Cats C and D and Circling Cats B and C $\frac{1}{4}$ SM. For inop MALS, increase S-34 Cats C and D visibility to $1\frac{3}{8}$.</p>
--	--

MALS



MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct WATON LOM and hold.

AWOS-3PT 135.625	SEATTLE APP CON 128.5 306.9	CLNC DEL 121.725	CTAF 122.725 0
----------------------------	---------------------------------------	----------------------------	--------------------------

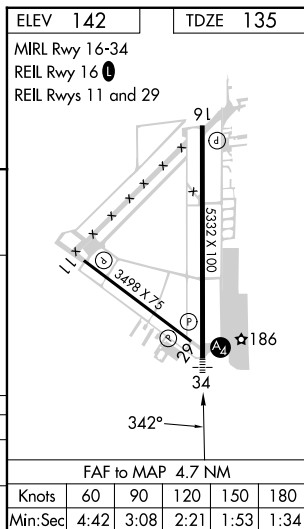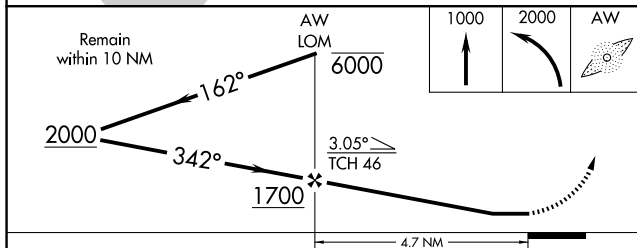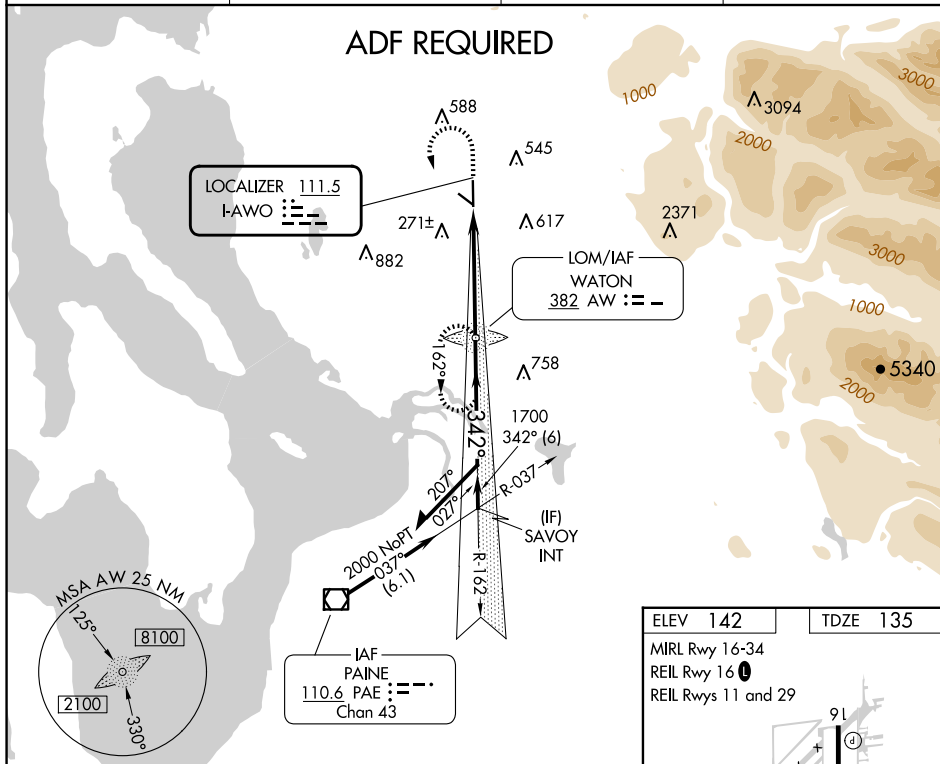

CATEGORY	A	B	C	D
S-34	580- $\frac{3}{4}$ 445 (500- $\frac{3}{4}$)		580-1 445 (500-1)	
CIRCLING	840-1 698 (700-1)	900-1 758 (800-1)	1000-2 $\frac{1}{2}$ 858 (900-2 $\frac{1}{2}$)	1040-3 898 (900-3)