


WAAS CH 77629 W32A	APP CRS 325°	Rwy Ldg TDZE Apt Elev	4200 697 708
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 32
CLINTON MUNI (CWI)

RNP APCH.		MISSED APPROACH: Climb to 2500 direct ORARE and hold.
<div><div>T</div><div>A</div></div>	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3PT 125.525	QUAD CITY APP CON ★ 125.95 257.8	CLNC DEL 118.5 0	UNICOM 123.075 (CTAF)
----------------------------	--	----------------------------	---------------------------------

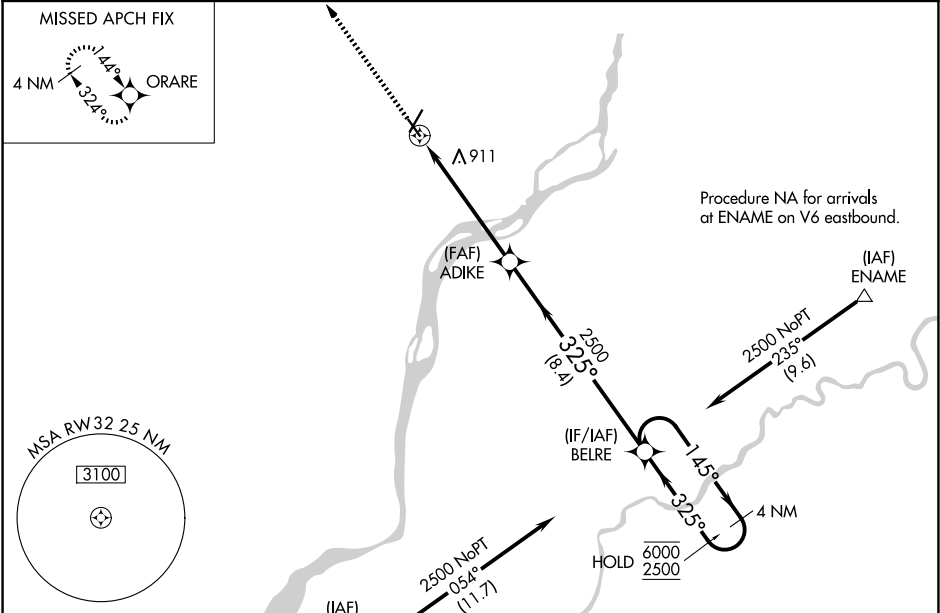

ELEV 708	D	TDZE 697
REIL Rwys 14 and 21 1		
MIRL Rwy 14-32 1		
HIRL Rwy 3-21 1		

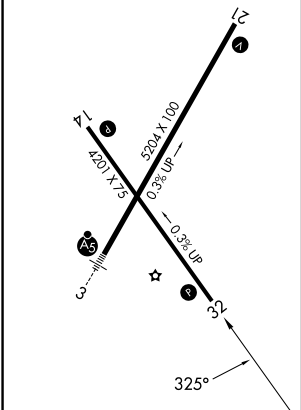

2500 ORARE		ADIKE 2500		BELRE 4 NM Holding Pattern	
*LNAV only.		*1.4 NM to RW32		GP 3.00° TCH 40	
RW32		2500		6000 2500	
1.4 NM		4.2 NM		8.4 NM	
CATEGORY	A	B	C	D	
LPV DA	947-1 250 (300-1)			NA	
LNAV/VNAV DA	1205-1 3/8 508 (500-1 3/8)			NA	
LNAV MDA	1180-1	483 (500-1)	1180-1 3/8 483 (500-1 3/8)	NA	
CIRCLING	1180-1 472 (500-1)	1240-1 532 (600-1)	1240-1 1/2 532 (600-1 1/2)	NA	