

LOC/DME I-PQL	APP CRS	Rwy Idg
<b>110.1</b>	<b>168°</b>	<b>6501</b>
Chan <b>38</b>		TDZE <b>17</b>
		Apt Elev <b>17</b>


ILS or LOC RWY 17

TRENT LOTT INTL (PQL)

⚠



When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase DA to 292 feet; increase all MDA 80 feet and S-LOC 17 visibility Cat B ¼ SM, increase Circling visibility Cats B and C ¼ SM. OTIME Fix Minimums, increase S-LOC 17 visibility Cats C and D ½ SM and Circling Cats C and D ½ SM. For inop ALS when using Mobile Rgnl altimeter setting increase S-ILS all Cats visibility to ¾ SM.

MALSR



MISSED APPROACH: Climb to 900 then climbing left turn to 2000 direct SJI VORTAC and hold.

ATIS	MOBILE APP CON★	TRENT LOTT TOWER★	GND CON	CLNC DEL	UNICOM
<b>135.175</b>	<b>121.0 307.1</b>	<b>118.575 (CTAF) 0</b>	<b>121.725</b>	<b>121.725</b>	<b>122.8</b>

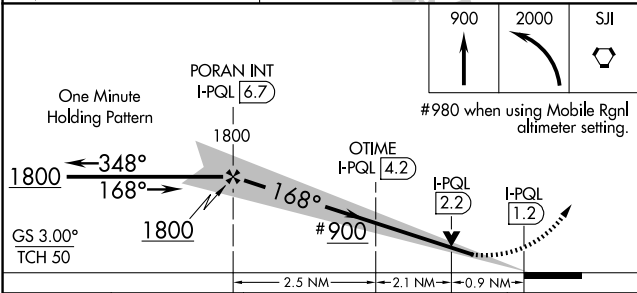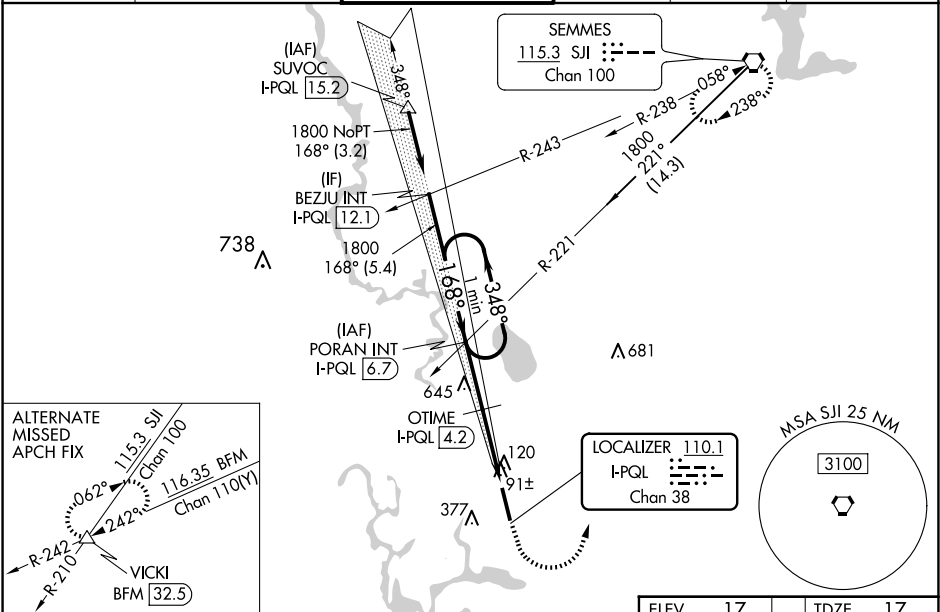

CATEGORY	A	B	C	D
S-ILS 17	217-½ 200 (200-½)			
S-LOC 17	900-¾ 883 (900-¾)	900-2		883 (900-2)
CIRCLING	900-1¼ 883 (900-1¼)	900-2¾ 883 (900-2¾)		900-3 883 (900-3)
OTIME FIX MINIMUMS				
S-LOC 17	360-½ 343 (400-½)	360-⅝		343 (400-⅝)
CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1¾ 663 (700-1¾)	680-2 663 (700-2)

