

WAAS CH 53641 W23A	APP CRS 228°	Rwy Idg TDZE Apt Elev	5500 927 927
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 23
LAKE CUMBERLAND RGNL (SME')

RNP APCH - GPS.

⚠ Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Monticello altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat B/C/D ½ SM, and LP visibility Cat C/D ⅓ SM, and Circling visibility Cat B ¼ SM. VDP NA when using Monticello altimeter setting.

MISSED APPROACH:
Climb to 3600 direct
TOOLY and hold.

AWOS-3 120.05	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF) 0
-------------------------	---	---------------------------------

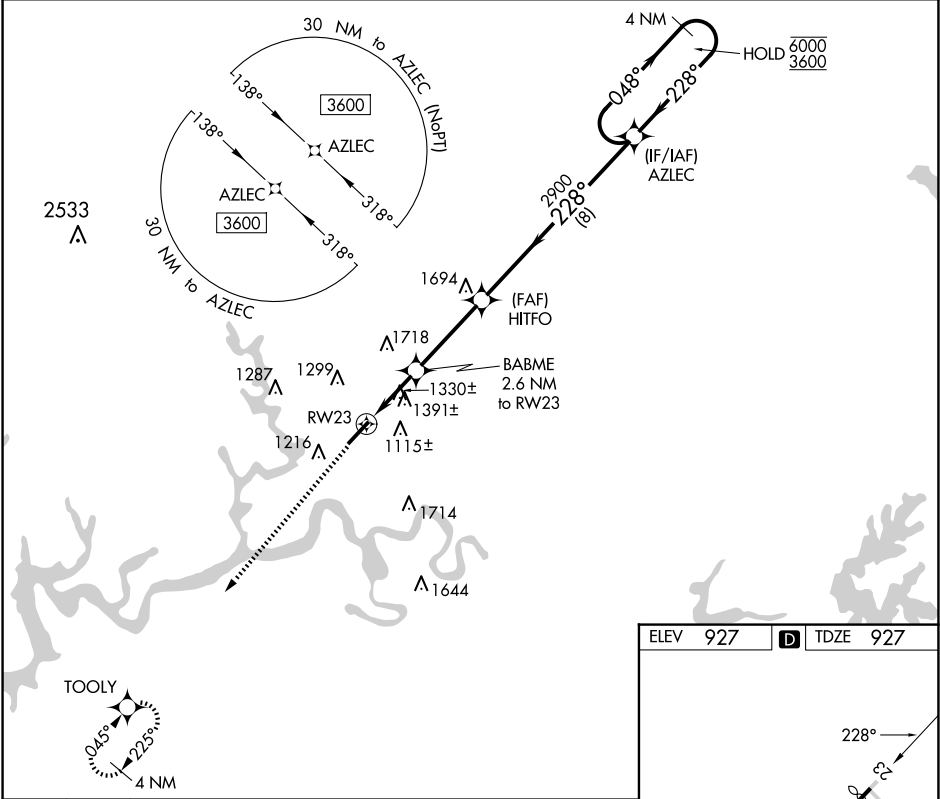

3600 TOOLY

BABME 2.6 NM to RW23

HITFO

AZLEC Holding Pattern

4 NM

048° 6000

228° 3600

1820

2900

3.00° TCH 53


1.9 NM to RW23

0.7 NM

3.4 NM

8 NM

CATEGORY	A	B	C	D
LP MDA	1580-1	653 (700-1)	1580-1 7/8	653 (700-1 7/8)
LNAV MDA	1660-1	733 (800-1)	1660-2	733 (800-2)
CIRCLING	1660-1	1700-1	2100-3	1173 (1200-3)
	733 (800-1)	773 (800-1)		

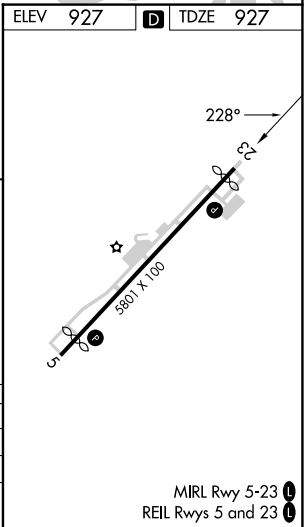

SE-1, 07 AUG 2025 to 04 SEP 2025

SE-1, 07 AUG 2025 to 04 SEP 2025