

WAAS CH 86507 W31A	APP CRS 308°	Rwy Idg 5501 TDZE 2585 Apt Elev 2589
--	------------------------	---

APP CRS
308°

Rwy Idg	5501
TDZE	2585
Apt Elev	2589

RNAV (GPS) RWY 31
AINSWORTH RGNL (ANW)

RNP APCH.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct FEDPI and hold.

AWOS-3
118,325

DENVER CENTER
127.95 338.2UNICOM
122.8 (CTAF) **L**


MISSED APCH FIX

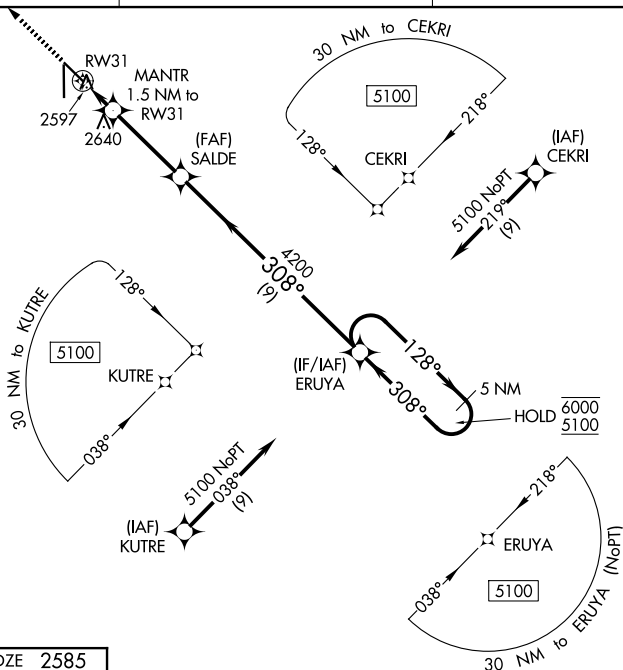

4049

ELEV 2589

TDZE 2585



HIRL Rwy 13-31 and 17-35 **L**
REIL Rwy 31 **L**

***LNAV only**

MANTR 1.5 NM to RW31

SALDE 4200

ERUYA


5 NM Holding Pattern

128° → **← 308°**

6000
5100

GP 3.00° TCH 52

CATEGORY	A	B	C	D
LPV DA	2785-1 200 (200-1)			
LNAV/VNAV DA	2835-1 250 (300-1)			
LNAV MDA	2860-1 275 (300-1)			
CIRCLING	3000-1 411 (500-1)	3040-1 451 (500-1)	3040-1½ 451 (500-1½)	3200-2 611 (700-2)

CATEGORY		A	B	C	D
LPV	DA	2785-1 200 (200-1)			
LNAV/ VNAV	DA	2835-1 250 (300-1)			
LNAV	MDA	2860-1 275 (300-1)			
 CIRCLING		3000-1 411 (500-1)	3040-1 451 (500-1)	3040-1½ 451 (500-1½)	3200-2 611 (700-2)