RNAV (GPS) RWY 17

GEORGE L SCOTT MUNI (3Y2)

WAAS	APP CRS	Rwy Idg	4149
CH 78238	174°	TDZE	1232
W17A		Apt Elev	1232

RNP APCH.

T A NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decorah altimeter setting. Helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received, use Decorah altimeter setting and increase LPV and LNAV/VNAV DA to 1533 all Cats, increase all MDA 60 feet, and LNAV Cat C visibility ⅛ mile.

MISSED APPROACH: Climb to 3200 direct KIRTS and hold.

MINNEAPOLIS CENTER	UNICOM
118.85	122.8 (CTAF) L

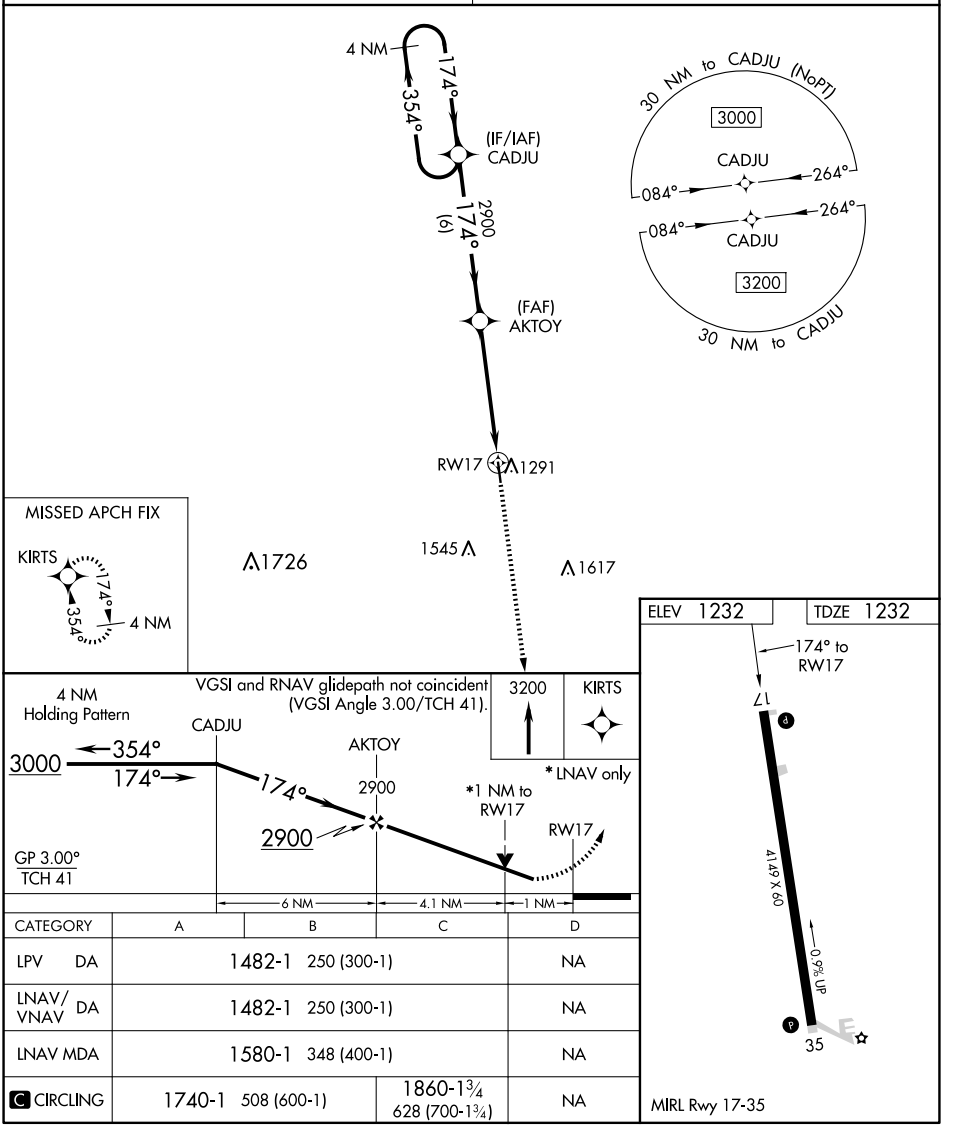

CATEGORY	A	B	C	D
LPV DA	1482-1	250 (300-1)		NA
LNAV/VNAV DA	1482-1	250 (300-1)		NA
LNAV MDA	1580-1	348 (400-1)		NA
C CIRCLING	1740-1	508 (600-1)	1860-1¾ 628 (700-1¾)	NA

NC-3, 07 AUG 2025 to 04 SEP 2025
NC-3, 07 AUG 2025 to 04 SEP 2025