

| | | |
|--|------------------------|---|
| WAAS CH 78401 W36A | APP CRS 358° | Rwy Idg 6000 TDZE 443 Apt Elev 447 |
|--|------------------------|---|


RNAV (GPS) RWY 36

MESQUITE METRO (HQZ)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dallas Love Fld altimeter setting and increase all DA/MDA 60 feet. Increase LPV all Cats visibility to 1 mile, increase Circling Cat C visibility to 2¼ mile. VDP NA when using Dallas Love Fld altimeter setting.

MISSED APPROACH:
Climbing right turn to 3000
direct YEAGR and hold.

| | | | | |
|--------------------------|--|---|--------------------------|-------------------------|
| AWOS-3 118.175 | LONE STAR APP CON 125.2 343.65 | MESQUITE TOWER★ 120.3 (CTAF) 0 | GND CON 118.85 | UNICOM 123.05 |
|--------------------------|--|---|--------------------------|-------------------------|

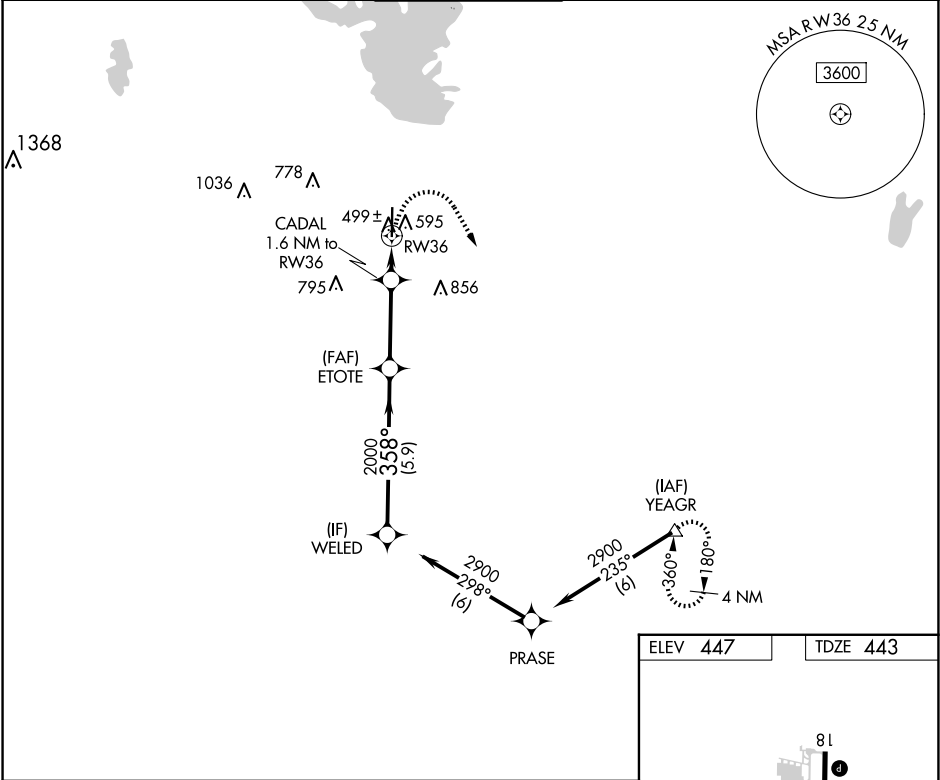

| | | | | | | | |
|--------------------|---------|-------------|-----------------------|-------------------------|----|--------------------|--|
| WELED | | ETOTE | | CADAL 1.6 NM to RW36 | | 3000 YEAGR △ | |
| 2900 | | 2000 | | *980 | | *LNAV only. | |
| GP 3.00° TCH 42 | | 358° | | 0.9 NM to RW36 | | RW36 | |
| 5.9 NM | | 3.2 NM | | 0.7 NM | | 0.9 NM | |
| CATEGORY | A | B | C | D | | | |
| LPV DA | 693-7/8 | | 250 (300-7/8) | | | NA | |
| LNAV MDA | 760-1 | | 317 (400-1) | | | NA | |
| CIRCLING | 960-1 | 513 (600-1) | 1160-2 713 (800-2) | | NA | | |

