

LAKE CHARLES, LOUISIANA

AL-5111 (FAA)

22363

LOC I-CWF	APP CRS	Rwy Idg	10702
110.7	154°	TDZE	16
		Apt Elev	17

# ILS or LOC RWY 15




CHENNAULT INTL (CWF)

ADF or DME required for procedure entry. ADF or DME required for LOC only.

**NA** VDP NA when using Lake Charles Rgnl altimeter setting. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting: Increase DA to 232 feet; Increase all MDAs 20 feet and visibility Circling Cat D ¼ SM. For inop ALS, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cats C/D/E to 1 ¾ SM. For inop ALS when using Lake Charles altimeter settings, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cats C/D/E to 1 ¾ SM. DME from LCH VORTAC. DME use requires simultaneous reception of I-CWF and LCH DME.

**MALS R** MISSED APPROACH: Climb to 2000 direct LCH VORTAC and hold, continue climb-in-hold to 2000.

ATIS	LAKE CHARLES APP CON*	CHENNAULT TOWER*	GND CON	UNICOM
120.0	119.8 282.3	124.2 (CTAF) 0 290.4	121.65 275.8	122.95

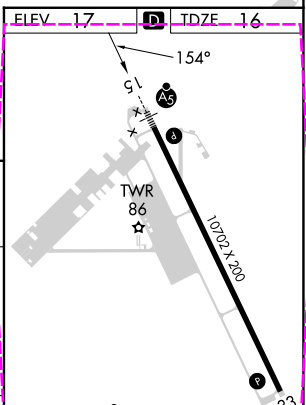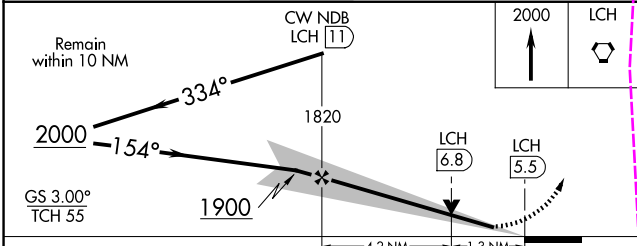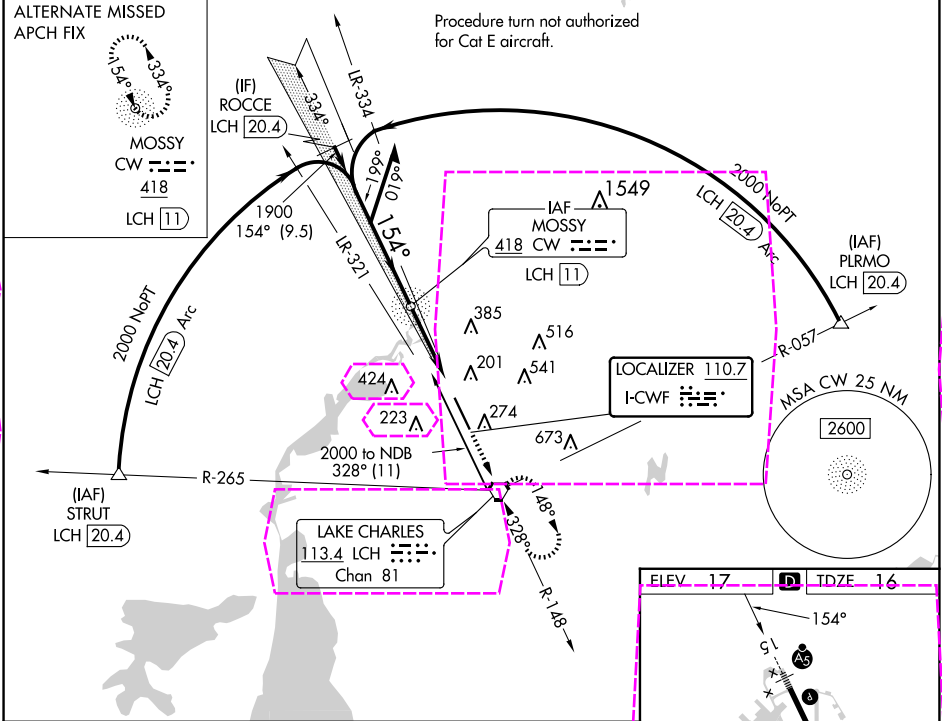

CATEGORY	A	B	C	D	E
S-ILS 15	216-1/2 200 (200-1/2)				
S-LOC 15	480-1/2	464 (500-1/2)	480-1 464 (500-1)		
CIRCLING	640-1	623 (700-1)	640-1 3/4	740-2 1/4	900-3
			623 (700-1 3/4)	723 (800-2 1/4)	883 (900-3)

REIL Rwy 33	0				
HIRL Rwy 15-33	0				
FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

LAKE CHARLES, LOUISIANA  
Amdt 7 29DEC22

30°13'N-93°09' W

CHENNAULT INTL (CWF)  
ILS or LOC RWY 15

SC-4, 10 JUL 2025 to 07 AUG 2025

SC-4, 10 JUL 2025 to 07 AUG 2025

