

PONTIAC, ILLINOIS

AL-9119 (FAA)

24361

WAAS CH 86708 W06A	APP CRS 060°	Rwy Idg 5000 TDZE 657 Apt Elev 666
----------------------------------------	------------------------	---------------------------------------------------------------



RNAV (GPS) RWY 6

PONTIAC MUNI (PNT)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1138 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1339 feet and all visibilities 1 SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM. Visibility reduction by helicopters NA.

MISSED APPROACH:
Climb to 3000 direct KEJDO and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 1
--------------------------	---------------------------------------	-----------------------------------

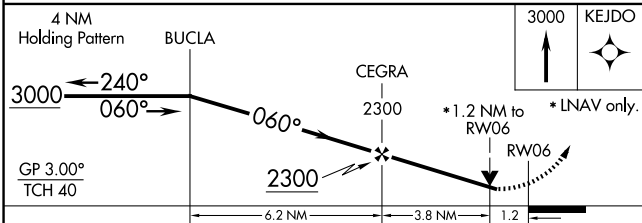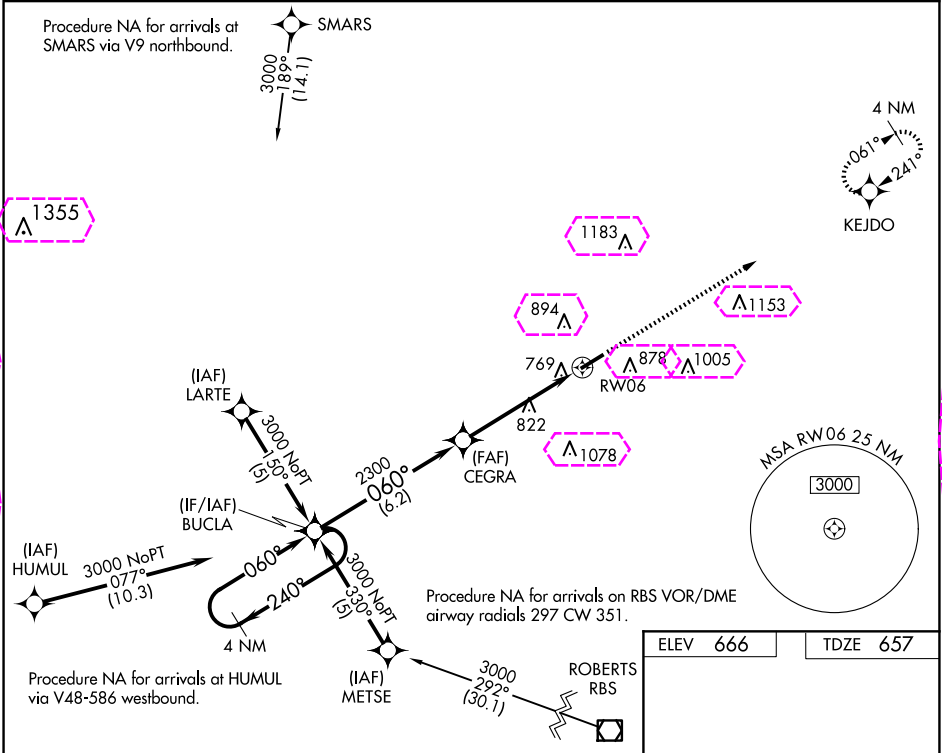

CATEGORY	A	B	C	D
LPV DA	1040-1½	383 (400-1½)		NA
LNAV/VNAV DA	1071-1½	414 (500-1½)		NA
LNAV MDA	1080-1	423 (500-1)	1080-1¼ 423 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)	1200-1 534 (600-1)	1320-1¾ 654 (700-1¾)	NA

MIRL Rwy 6-24 1

PONTIAC, ILLINOIS
Orig-B 12AUG21

40°55'N-88°37'W

RNAV (GPS) RWY 6

EC-3, 10 JUL 2025 to 07 AUG 2025

EC-3, 10 JUL 2025 to 07 AUG 2025

PONTIAC, ILLINOIS

AL-9119 (FAA)

25219



WAAS CH 86708 W06A	APP CRS 060°	Rwy Ldg 5000 TDZE 657 Apt Elev 666
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 6
PONTIAC MUNI (PNT)


⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1138 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1339 feet and all visibilities 1 SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM. Visibility reduction by helicopters NA.

MISSED APPROACH:
Climb to 3000 direct KEJDO and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

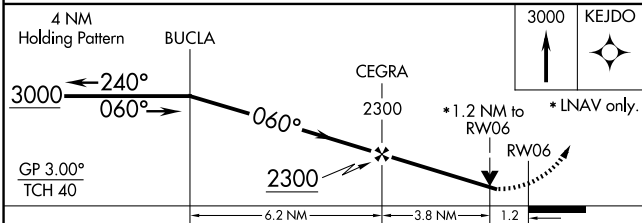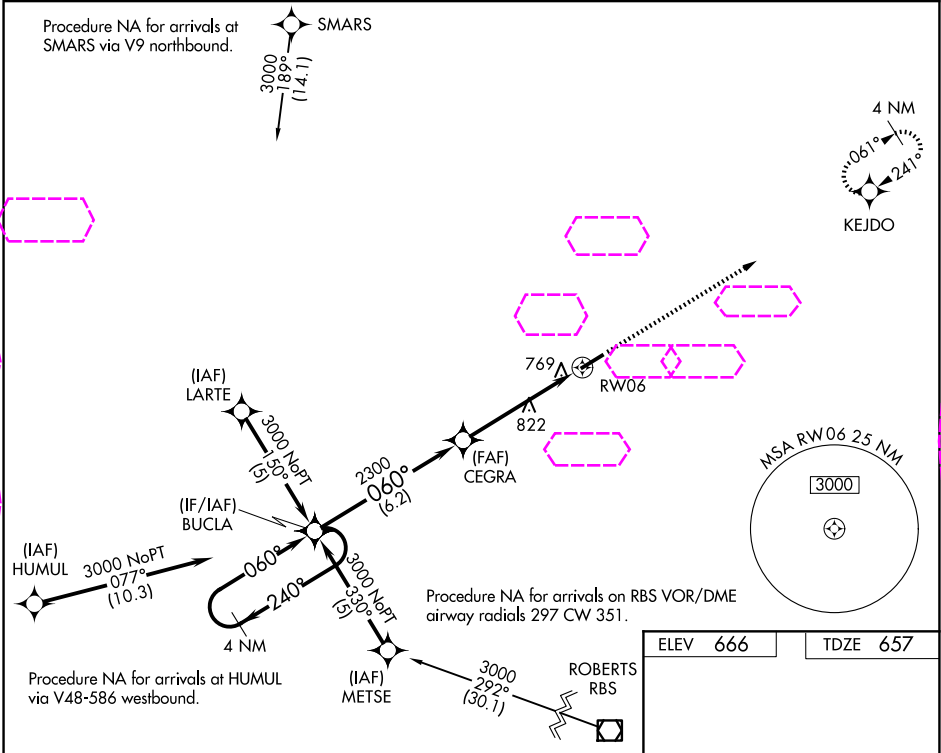

CATEGORY	A	B	C	D
LPV DA	1040-1½	383 (400-1½)		NA
LNAV/ VNAV DA	1071-1½	414 (500-1½)		NA
LNAV MDA	1080-1	423 (500-1)	1080-1¼ 423 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)	1200-1 534 (600-1)	1320-1¾ 654 (700-1¾)	NA

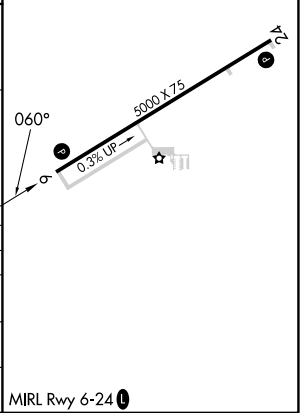

EC-3, 07 AUG 2025 to 04 SEP 2025

EC-3, 07 AUG 2025 to 04 SEP 2025