

CRANDON, WISCONSIN

AL-10442 (FAA)




23278

WAAS CH 58036 W12A	APP CRS 115°	Rwy Idg 3550 TDZE 1650 Apt Elev 1650
--	------------------------	--

RNAV (GPS) RWY 12

CRANDON/STEVE CONWAY MUNI (Y55)

RNP APCH - GPS		MISSED APPROACH: Climb to 4400 direct YITUB and hold.
Baro-VNAV NA. Use Rhinelander altimeter setting, when not received, use Eagle River altimeter setting and increase LPV DA to 2063 feet; increase LNAV/VNAV DA to 2359 feet; increase all MDAs 20 feet. Rwy 12 helicopter visibility reduction below ¾ SM NA. Circling to Rwys 1, 19 NA.		
RHI ASOS 126.825	MINNEAPOLIS CENTER 133.65 281.5	CTAF 122.9 0

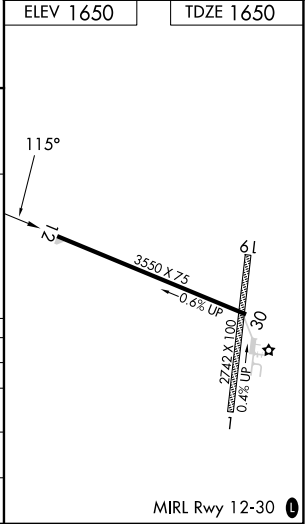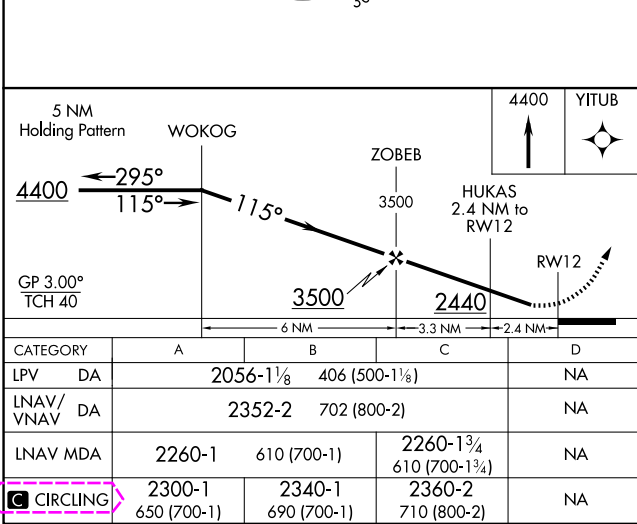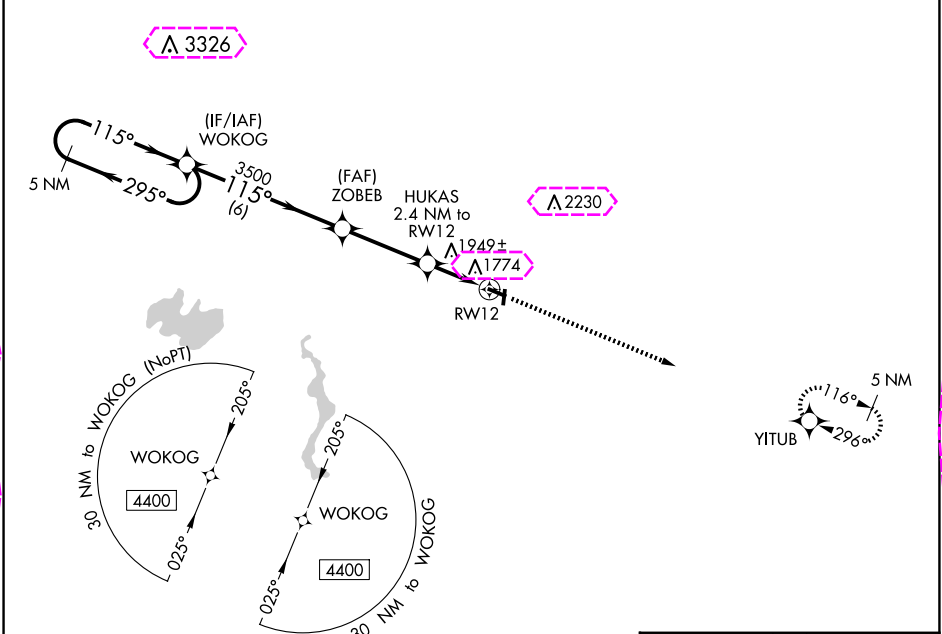

CRANDON, WISCONSIN

AL-10442 (FAA)


25219

WAAS CH 58036 W12A	APP CRS 115°	Rwy Ldg TDZE 1650 Apt Elev 1650
--	------------------------	---

RNAV (GPS) RWY 12

CRANDON/STEVE CONWAY MUNI (Y55)

RNP APCH - GPS		MISSED APPROACH: Climb to 4400 direct YITUB and hold.
Baro-VNAV NA. Use Rhinelander altimeter setting, when not received, use Eagle River altimeter setting and increase LPV DA to 2063 feet; increase LNAV/VNAV DA to 2359 feet; increase all MDAs 20 feet. Rwy 12 helicopter visibility reduction below ¾ SM NA. Circling to Rwys 1, 19 NA.		
RHI ASOS 126.825	MINNEAPOLIS CENTER 133.65 281.5	CTAF 122.9 0

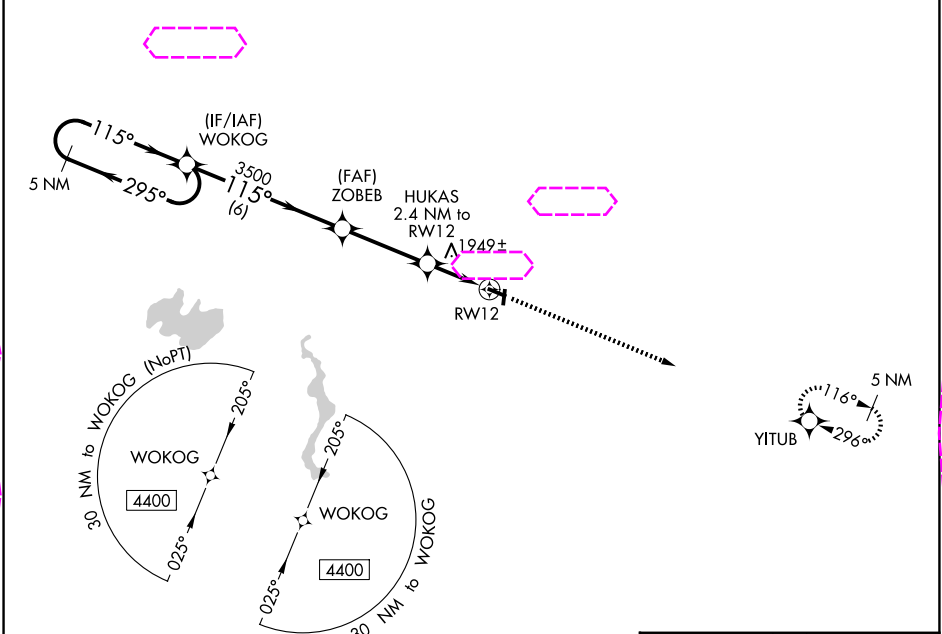

5 NM Holding Pattern

WOKOG

4400

←295°

115°→

GP 3.00° TCH 40

ZOBEB

3500

HUKAS 2.4 NM to RW12

3500

2440

RW12

6 NM

3.3 NM

2.4 NM

4400

YITUB

CATEGORY	A		B	C	D
LPV DA	2056-1⅛		406 (500-1⅛)		NA
LNAV/VNAV DA	2352-2		702 (800-2)		NA
LNAV MDA	2260-1	610 (700-1)	2260-1¾ 610 (700-1¾)		NA
CIRCLING	2300-1 650 (700-1)	2340-1 690 (700-1)	2360-2 710 (800-2)		NA

ELEV 1650

TDZE 1650

115°

12

3550 X 75

61

27.12 X 100

0.4% UP

0.6% UP

30

☆

MIRL Rwy 12-30

CRANDON, WISCONSIN

Orig-B 07SEP23

45°31'N-88°56'W

CRANDON/STEVE CONWAY MUNI (Y55)

RNAV (GPS) RWY 12

EC-3, 07 AUG 2025 to 04 SEP 2025

EC-3, 07 AUG 2025 to 04 SEP 2025