RNAV (GPS) RWY 35

RUSSELL COUNTY (K24)

WAAS	APP CRS	Rwy Ldg	5010
CH 63233	359°	TDZE	990
W35A		Apt Elev	1010

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Wayne County altimeter setting. When local altimeter setting not received, use Wayne County altimeter setting and increase all DA 42 feet and all MDA 60 feet. Increase LPV all Cats visibility ¼ mile and LNAV/VNAV all Cats visibility ⅛ mile and LNAV and Circling Cat C/D visibility ¼ mile. Helicopter visibility reduction below ¾ mile NA.

MISSED APPROACH: Climb to 4000 direct CIKIT and hold.

AWOS-3P	INDIANAPOLIS CENTER	UNICOM
119.6	124.625 371.925	123.0 (CTAF) L

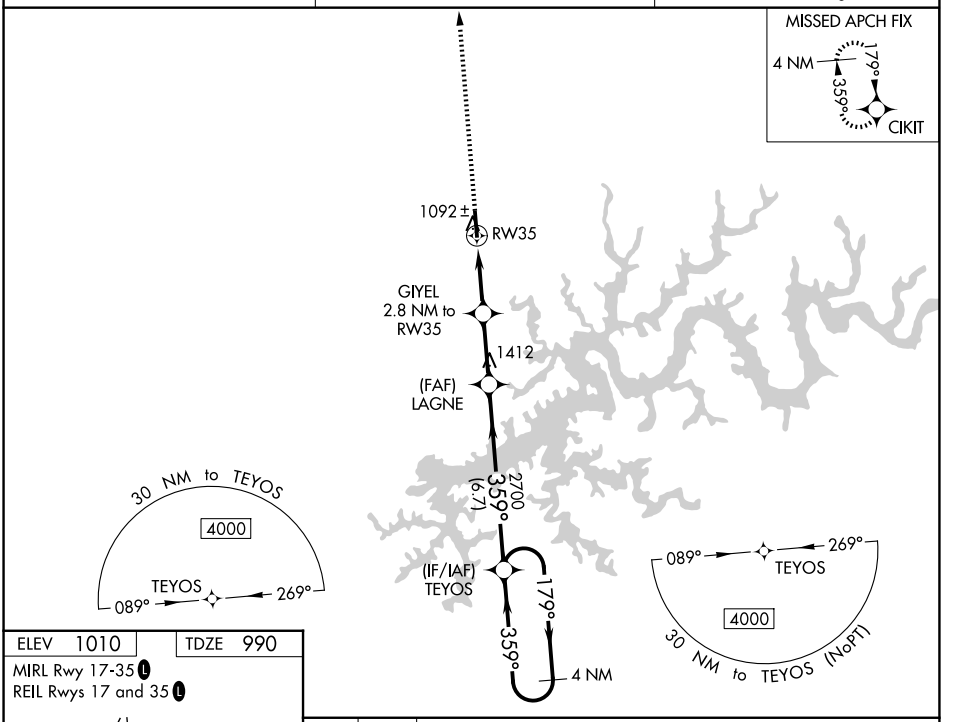

ELEV 1010 TDZE 990

MIRL Rwy 17-35 L

REIL Rwys 17 and 35 L

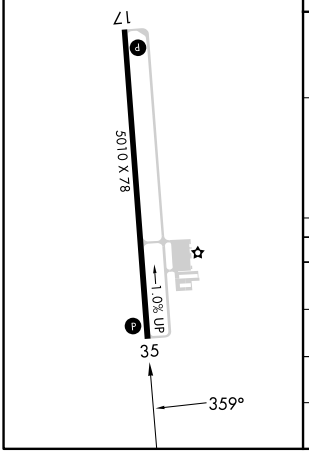

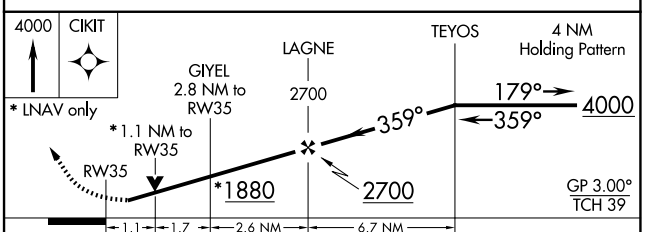

CATEGORY	A	B	C	D
LPV DA	1240-⅞ 250 (300-⅞)			
LNAV/VNAV DA	1285-1⅛ 295 (300-1⅛)			
LNAV MDA	1360-1 370 (400-1)			
CIRCLING	1540-1 530 (600-1)	1620-1 610 (700-1)	1700-2 690 (700-2)	1700-2¼ 690 (700-2¼)

SE-1, 06 AUG 2026 to 03 SEP 2026
SE-1, 06 AUG 2026 to 03 SEP 2026