WAAS CH 81830 W17A	APP CRS 173°	Rwy Ldg 12000 TDZE 5339 Apt Elev 5434

RNAV (GPS) Y RWY 17L

DENVER INTL (DEN)

RNP APCH - GPS.

T Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to RVR 4500. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 5900, then climbing left turn to 10000 direct UYOZY and track 128° to YEBUV and track 078° to LIMEX and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	132.35 239.275	121.35 379.175 (W) 121.85 377.1 (E)

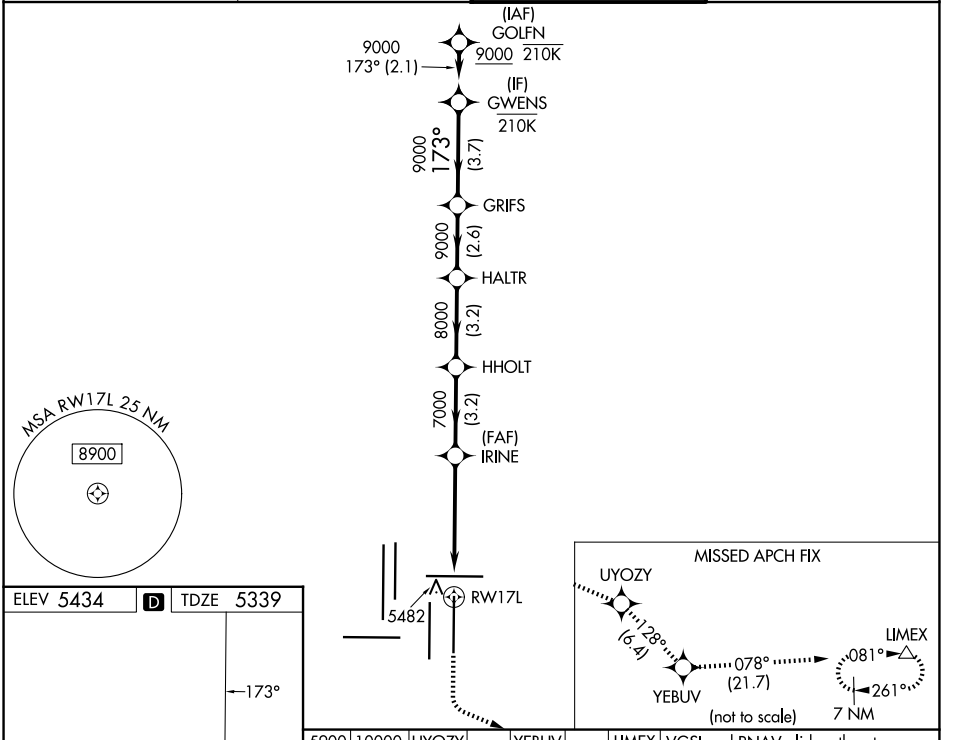



HIRL all Rwys
TDZL/RCLS Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

CATEGORY	A	B	C	D
LPV DA*	5539/24 200 (200-½)			
LNAV/VNAV DA	5648/24 309 (300-½)			
LNAV MDA	5720/24 381 (300-½)		5720/35 381 (300-⅝)	

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026